
AERODROME GROUND MOVEMENT CHART - ICAO

APRON ELEV
10 M

TWR:	118.6	PRI
	118.725	SRY
GROUND :	121.925	PRI
	121.625	SRY
	121.5	EMERG

AN GIANG/PHU QUOC INTL (VVPQ)

ELEVATIONS IN METRES
BEARINGS ARE MAGNETIC

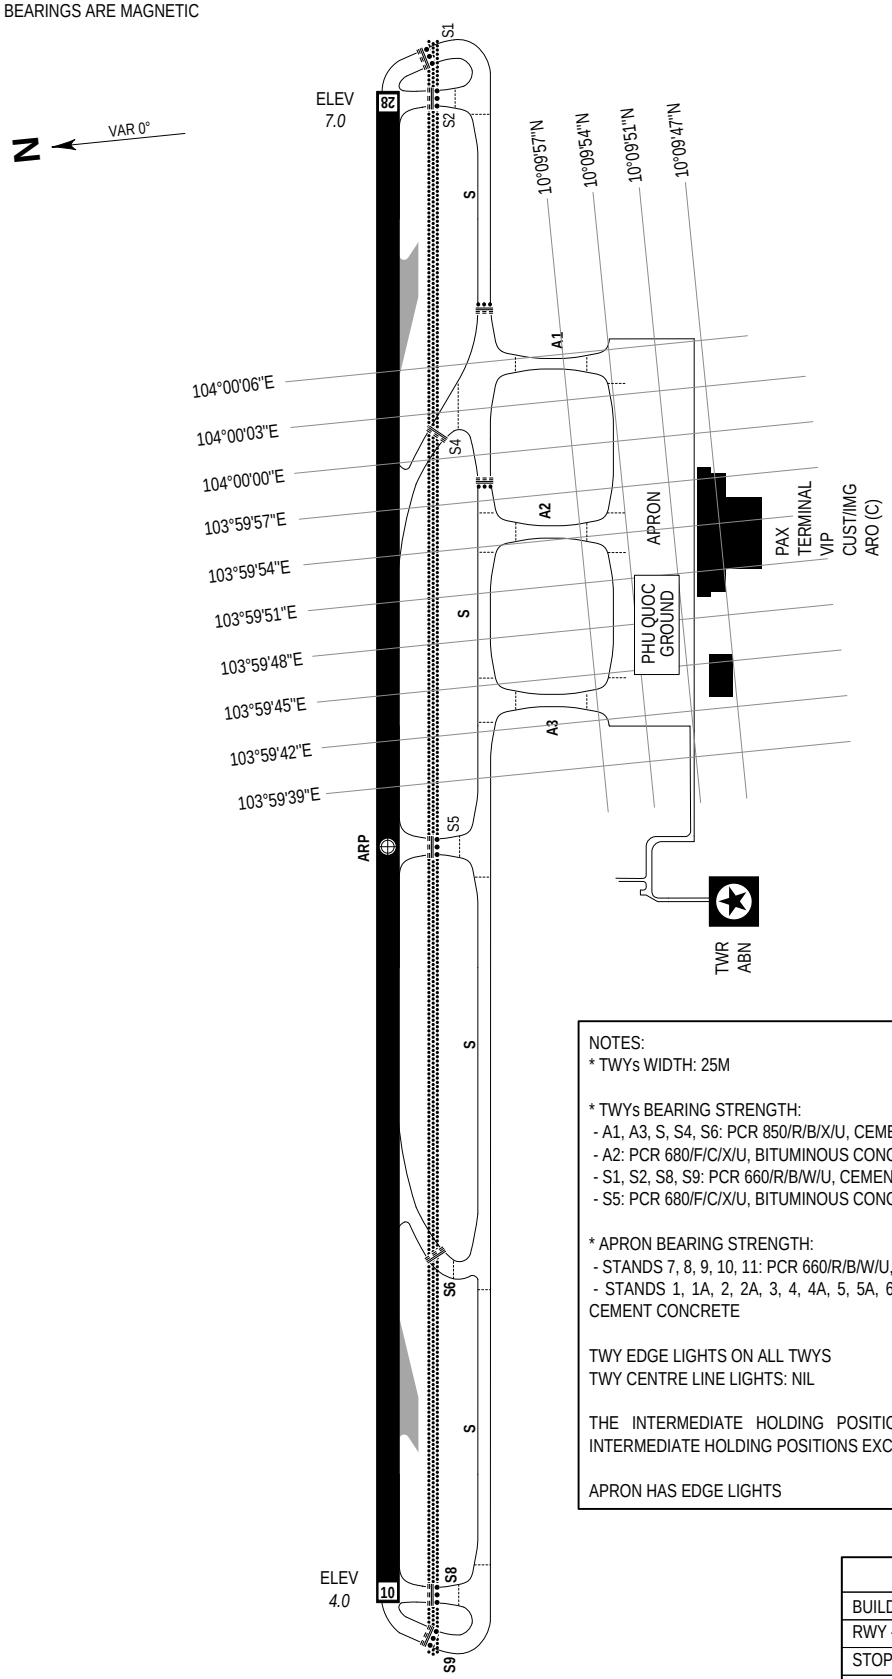

NOTES:
* TWYs WIDTH: 25M

* TWYs BEARING STRENGTH:
- A1, A3, S, S4, S6: PCR 850/R/B/X/U, CEMENT CONCRETE
- A2: PCR 680/F/C/X/U, BITUMINOUS CONCRETE
- S1, S2, S8, S9: PCR 660/R/B/W/U, CEMENT CONCRETE
- S5: PCR 680/F/C/X/U, BITUMINOUS CONCRETE

* APRON BEARING STRENGTH:
- STANDS 7, 8, 9, 10, 11: PCR 660/R/B/W/U, CEMENT CONCRETE
- STANDS 1, 1A, 2, 2A, 3, 4, 4A, 5, 5A, 6, 6A, 12, 13, 13A, 14: PCR 850/R/B/X/U, CEMENT CONCRETE

TWY EDGE LIGHTS ON ALL TWYS
TWY CENTRE LINE LIGHTS: NIL

THE INTERMEDIATE HOLDING POSITION LIGHTS ARE EQUIPPED AT ALL INTERMEDIATE HOLDING POSITIONS EXCEPT ON TWY S4.

APRON HAS EDGE LIGHTS

LEGEND	
BUILDINGS	
RWY – HOLDING POSITION (PATTERN A)	
STOP BAR	
INTERMEDIATE HOLDING POSITION	
ATC SERVICE BOUNDARY (GND)	

CHANGE: LOCATION NAME.