| RWY | DIRECTION (TRUE) | THR WGS-84 | BEARING STRENGTH |
|---|---|---|---|
| 11 | 114° | 17°31'04"N 106°35'05"E | PCN 58/R/B/X/T |
| 29 | 294° | 17°30'32"N 106°36'19"E | |


| | | |
|---|---|---|
| TWY | E2 | PCN 58/R/B/X/T CEMENT CONCRETE |
| APRON | 1, 2 | PCN 58/R/B/X/T CEMENT CONCRETE |
| | 3, 4, 4A | PCN 63/R/B/X/T CEMENT CONCRETE |

TWY WIDTH: E2 18M

ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC


N

VAR 1°W

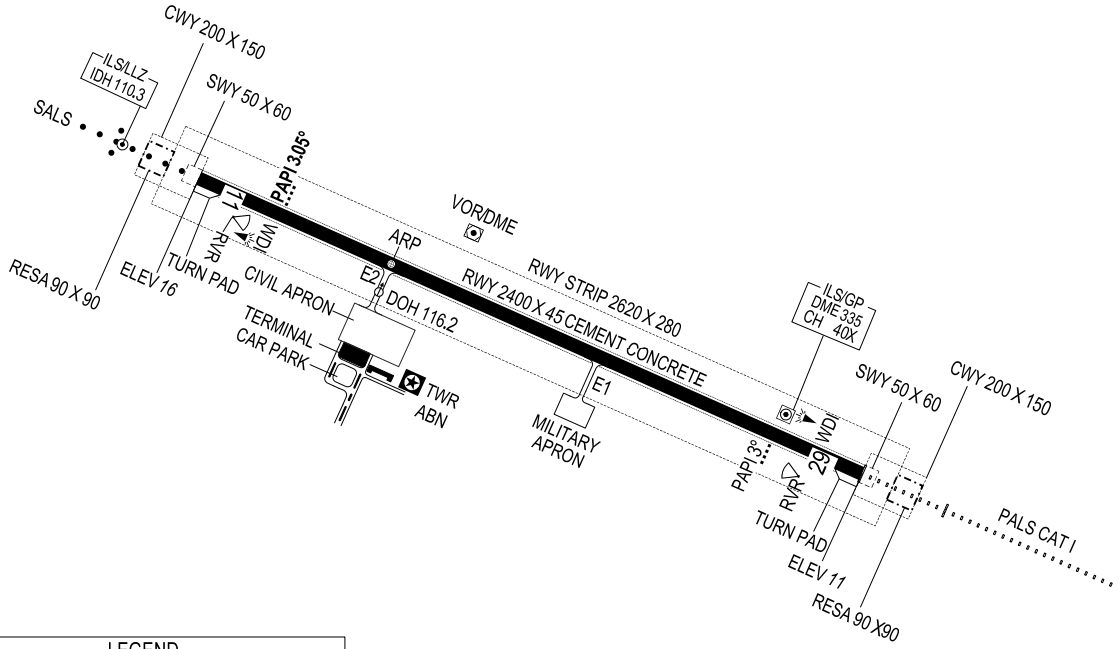


| LEGEND | |
|---|---|
| RWY – HOLDING POSITION | |
| VOR CHECK POINT AND FREQUENCY | DOH 116.2 |
| BUILDINGS | |
| TWY/RWY EDGE LIGHTS | |

LIGHTING AIDS THR RWY 11/29




SCALE 1: 25 000


METRES 300 0 500 1000

FEET 500 0 1000 2000 3000

MARKING AIDS RWY 11/29 AND EXIT TWY

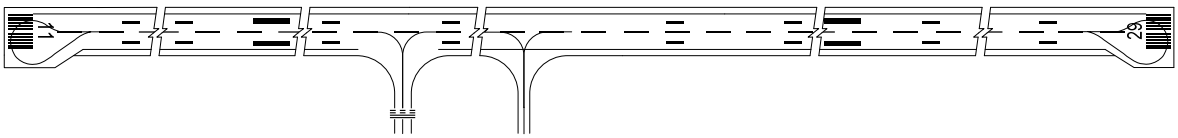

MARKING AIDS RWY 11/29 AND EXIT TWY

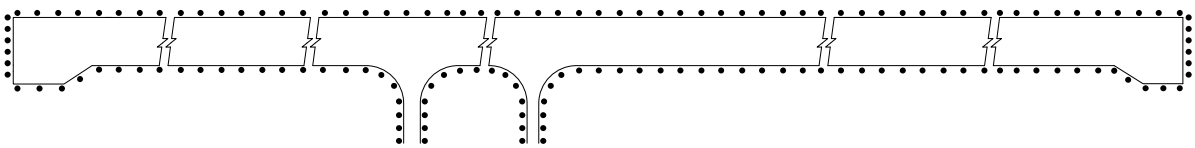

CHANGE: ADJUSTMENT OF PAPI LIGHT SLOPE RWY 11.