
AERODREME GROUND MOVEMENT CHART - ICAO

APRON ELEV
3M

TWR: 118.5

HAI PHONG/CAT BI INTL (VVCI)

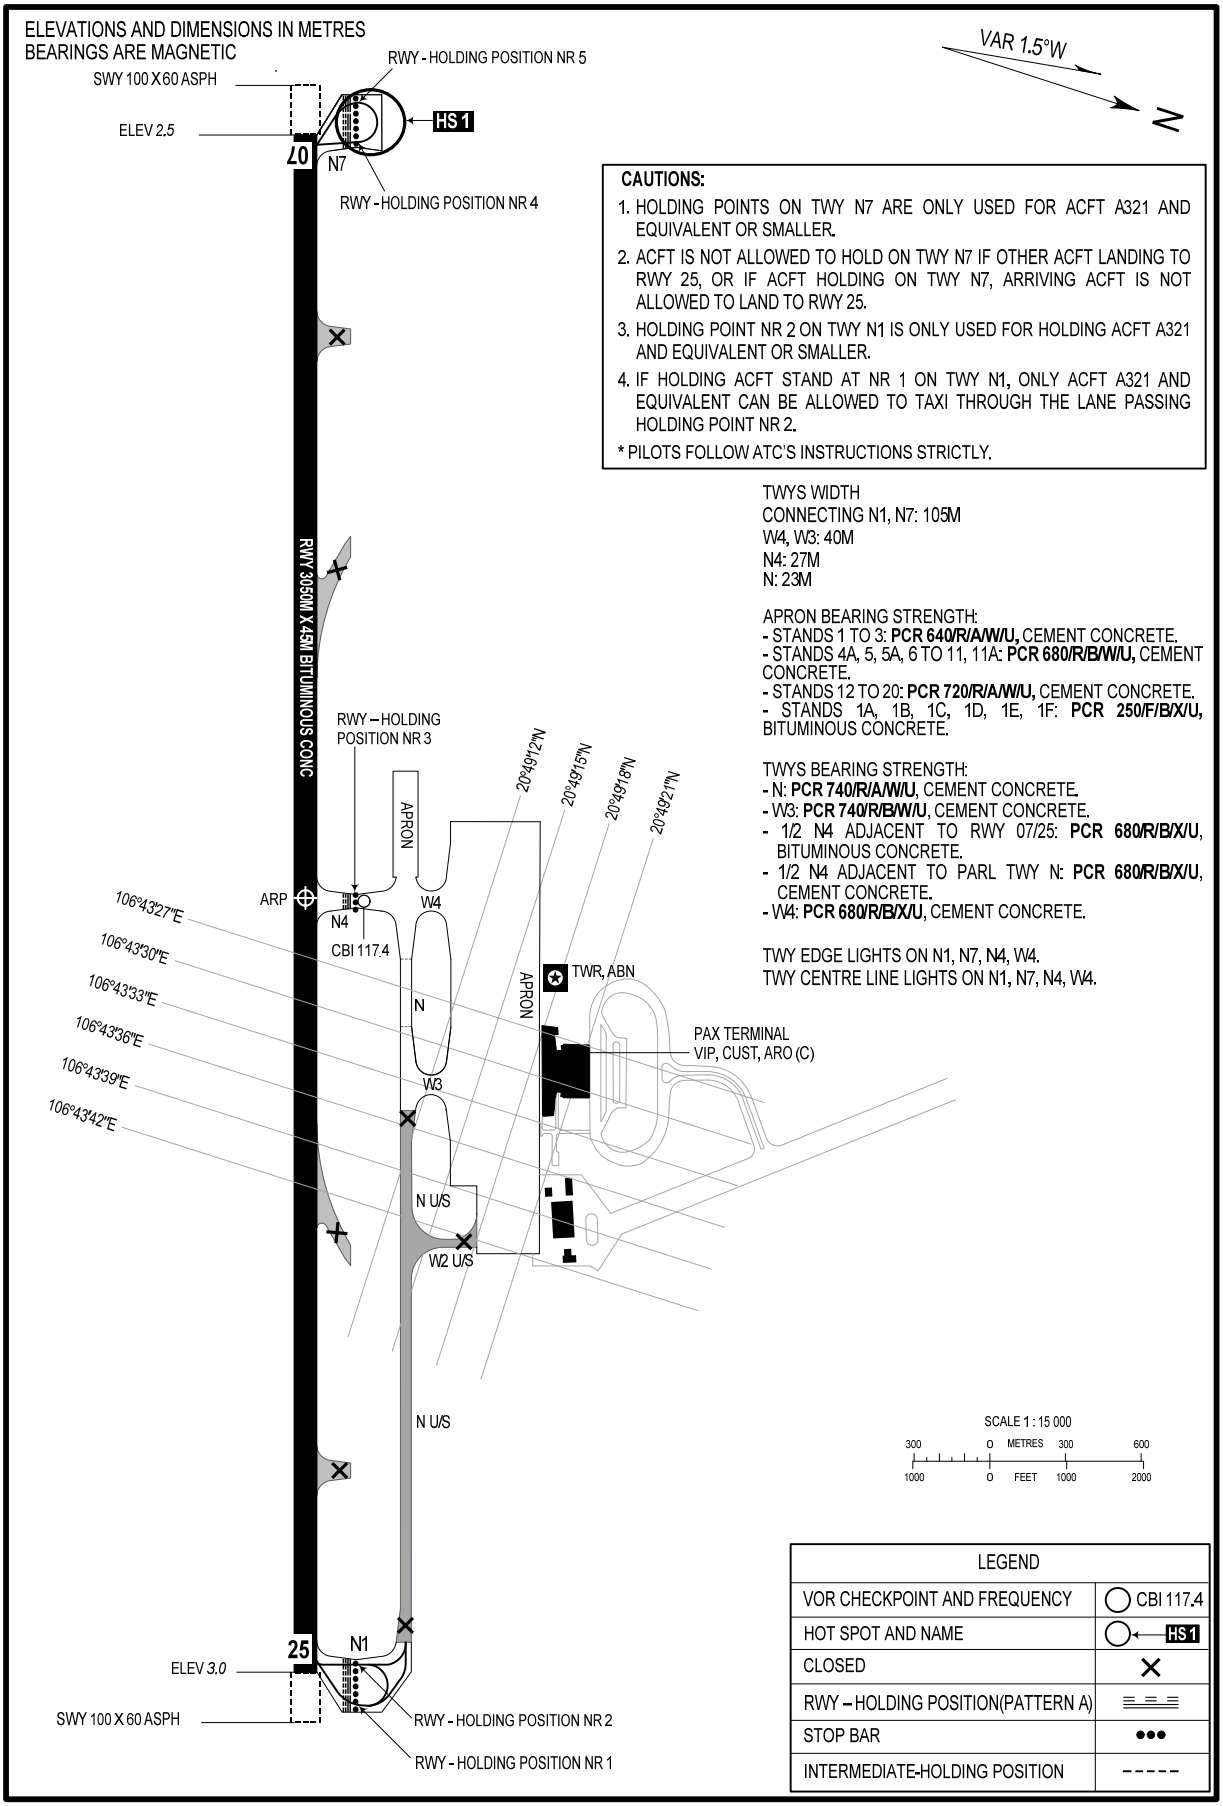

CAUTIONS:

1. HOLDING POINTS ON TWY N7 ARE ONLY USED FOR ACFT A321 AND EQUIVALENT OR SMALLER.
2. ACFT IS NOT ALLOWED TO HOLD ON TWY N7 IF OTHER ACFT LANDING TO RWY 25, OR IF ACFT HOLDING ON TWY N7, ARRIVING ACFT IS NOT ALLOWED TO LAND TO RWY 25.
3. HOLDING POINT NR 2 ON TWY N1 IS ONLY USED FOR HOLDING ACFT A321 AND EQUIVALENT OR SMALLER.
4. IF HOLDING ACFT STAND AT NR 1 ON TWY N1, ONLY ACFT A321 AND EQUIVALENT CAN BE ALLOWED TO TAXI THROUGH THE LANE PASSING HOLDING POINT NR 2.

* PILOTS FOLLOW ATC'S INSTRUCTIONS STRICTLY.

TWYS WIDTH
CONNECTING N1, N7: 105M
W4, W3: 40M
N4: 27M
N: 23M

APRON BEARING STRENGTH:
- STANDS 1 TO 3: **PCR 640/R/A/W/U,** CEMENT CONCRETE.
- STANDS 4A, 5, 5A, 6 TO 11, 11A: **PCR 680/R/B/W/U,** CEMENT CONCRETE.
- STANDS 12 TO 20: **PCR 720/R/A/W/U,** CEMENT CONCRETE.
- STANDS 1A, 1B, 1C, 1D, 1E, 1F: **PCR 250/F/B/X/U,** BITUMINOUS CONCRETE.

TWYS BEARING STRENGTH:
- N: **PCR 740/R/A/W/U**, CEMENT CONCRETE.
- W3: **PCR 740/R/B/W/U**, CEMENT CONCRETE.
- 1/2 N4 ADJACENT TO RWY 07/25: **PCR 680/R/B/X/U**, BITUMINOUS CONCRETE.
- 1/2 N4 ADJACENT TO PARL TWY N: **PCR 680/R/B/X/U**, CEMENT CONCRETE.
- W4: **PCR 680/R/B/X/U**, CEMENT CONCRETE.

TWY EDGE LIGHTS ON N1, N7, N4, W4.
TWY CENTRE LINE LIGHTS ON N1, N7, N4, W4.

SCALE 1 : 15 000

300	0	METRES	300	600
1000	0	FEET	1000	2000

LEGEND	
VOR CHECKPOINT AND FREQUENCY	CBI 117.4
HOT SPOT AND NAME	HS 1
CLOSED	×
RWY – HOLDING POSITION(PATTERN A)	= = =
STOP BAR	●●●
INTERMEDIATE-HOLDING POSITION	- - - - -

CHANGE: ADJUSTMENT OF PCN TO PCR (TWY AND APRON).