RWY	DIRECTION (TRUE)	THR WGS-84	BEARING STRENGTH
06	060°	10°04'37"N 105°41'51"E	**PCR 640/F/C/X/U** SBS AND POLYMER CONCRETE
24	240°	10°05'26"N 105°43'17"E	


ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

TAXIWAY WIDTH S4: 23M

TAXIWAY BEARING STRENGTH S4 **PCR 640/F/C/X/U**, BITUMINOUS CONCRETE
APRON BEARING STRENGTH :


+ FROM STANDS 1 TO 6: **PCR 960/R/C/X/U**, CEMENT CONCRETE
+ FROM STANDS 7 TO 11: **PCR 740/R/A/X/U**, CEMENT CONCRETE


NOTES: TAXIWAYS S, S1, S2, S3, S5 AND S6 (EXCEPT TURN-PAD) FOR MILITARY ONLY, ARE NOT USED FOR CIVIL AVIATION OPERATION.

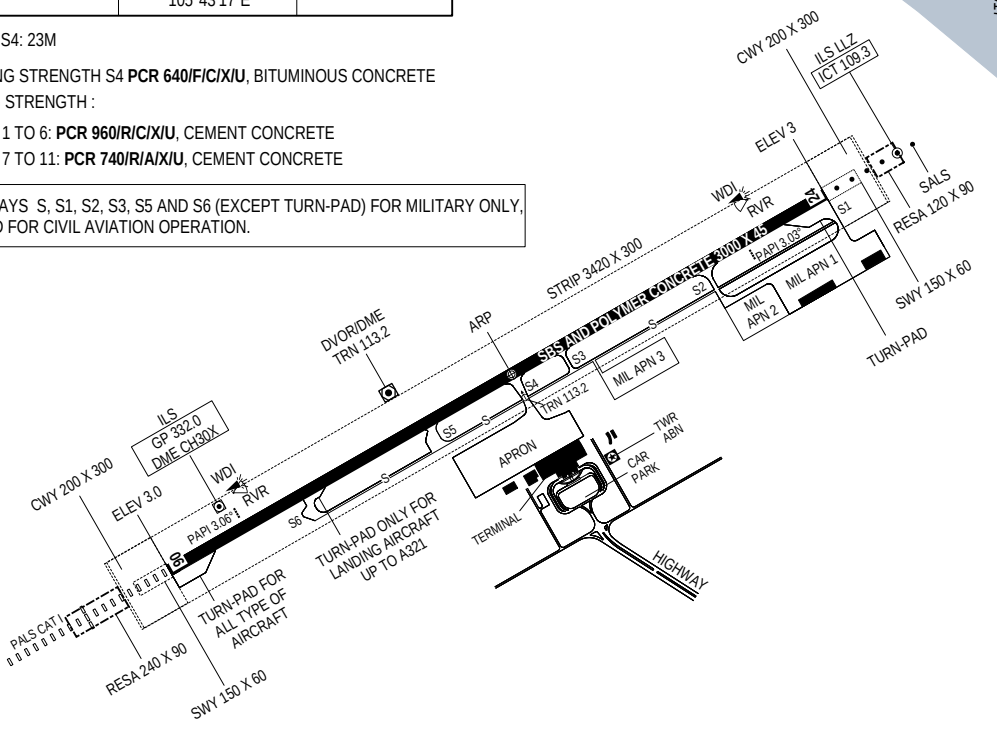


LEGEND	
VOR CHECK POINT AND FREQUENCY	TRN 113.2
RWY/TWY EDGE LIGHTS	
BUILDINGS	
RWY-HOLDING POSITION (PATTERN A)	

LIGHTING AIDS
THR RWY 06/24






MARKING AIDS RWY 06/24 AND EXIT TWY



LIGHTING AIDS RWY 06/24 AND EXIT TWY

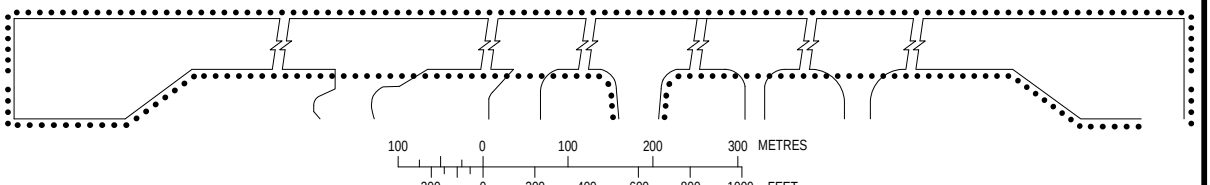

CHANGE: ADJUSTMENT OF PCN TO PCR (RWY, TWY AND APRON).