
RWY	DIRECTION (TRUE)	THR WGS-84	BEARING STRENGTH
09	092°	09°10'40"N - 105°10'16"E	PCR 236/F/C/X/T
27	272°	09°10'38"N - 105°11'05"E	

ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

N

VAR 0°W 2016

TAXIWAY WIDTH 15M
TAXIWAY BEARING STRENGTH PCR 373/F/C/X/T, BITUMINOUS CONCRETE
APRON BEARING STRENGTH **PCR 413/F/C/X/T**, BITUMINOUS CONCRETE

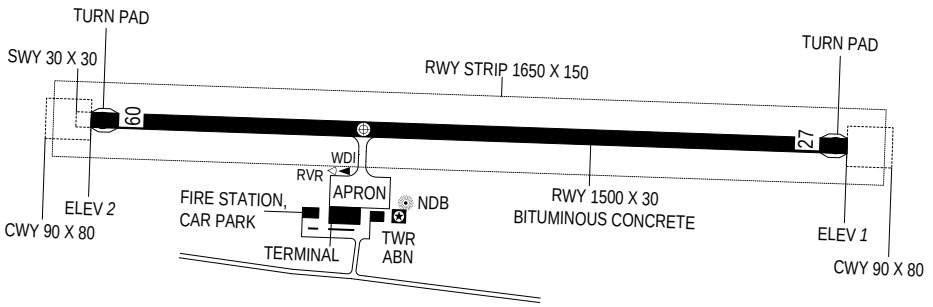


LEGEND	
BUILDINGS	■
ARP	⊕


LIGHTING AIDS CLEARWAY AND STOPWAY RWY 09/27

(TO BE DEVELOPED)

SCALE 1: 15 000



MARKING AIDS RWY 09/27 AND EXIT TWY

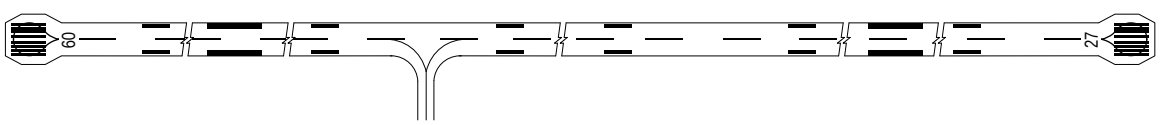

LIGHTING AIDS RWY 09/27 AND EXIT TWY

(TO BE DEVELOPED)

NOT TO SCALE

CHANGE: ADJUSTMENT OF PCN TO PCR (APRON).