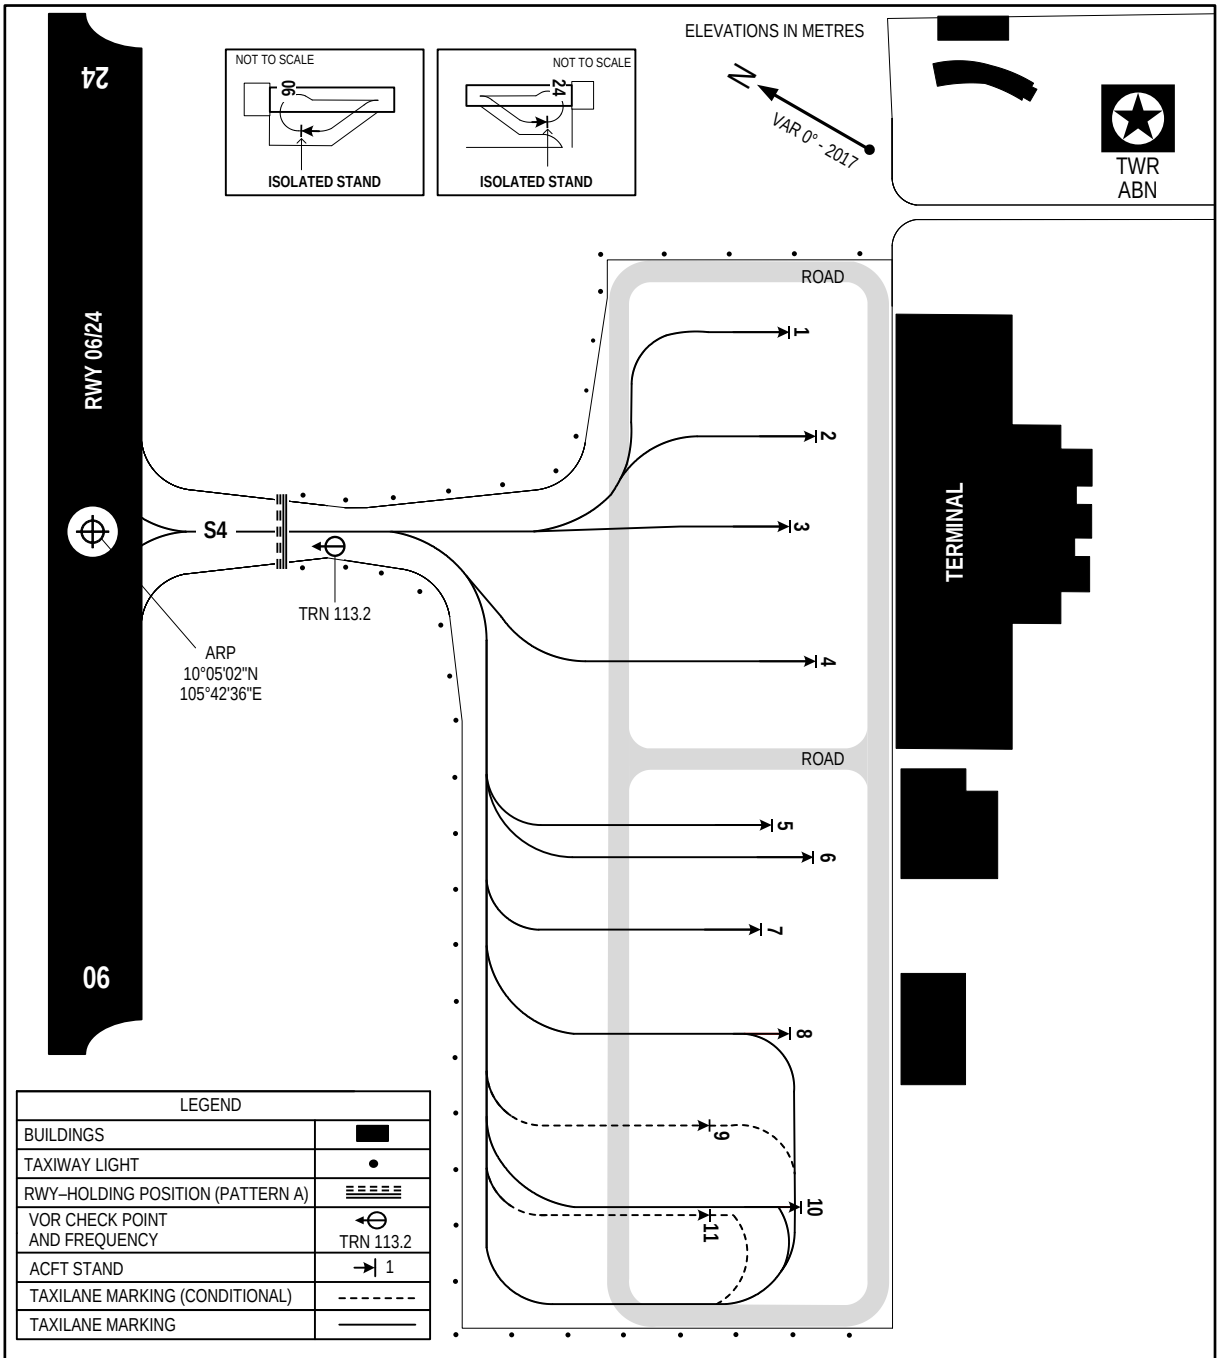


LEGEND	
BUILDINGS	
TAXIWAY LIGHT	
RWY–HOLDING POSITION (PATTERN A)	
VOR CHECK POINT AND FREQUENCY	TRN 113.2
ACFT STAND	1
TAXILANE MARKING (CONDITIONAL)	
TAXILANE MARKING	

METRES
50 0 50 100 150 200
100 0 200 FEET 400 600

TAXIWAY WIDTH S4: 23M

TAXIWAY BEARING STRENGTH S4: PCR 640/F/C/X/U, BITUMINOUS CONCRETE

APRON BEARING STRENGTH:

+ FM STANDS 1 TO 6: PCR 960/R/C/X/U, CEMENT CONCRETE

+ FM STANDS 7 TO 11: PCR 740/R/A/X/U, CEMENT CONCRETE

NOTES:

- STANDS 2, 4, 6, 8, 10 USED FOR ACFT UP TO CODE E AND EQUIVALENT;
- STANDS 1, 3, 5, 7, 9, 11 USED FOR ACFT UP TO CODE C AND EQUIVALENT;
- STANDS 8, 9, 11: USED FOR ACFT UP TO CODE C AND EQUIVALENT (ACFT SELF TAXI-IN TO STAND AND TAXI-OUT FOR DEPARTURE).
- ACFT CODE D/E IS ONLY PARKED AT STAND 2 WHEN THERE IS NO ACFT PARKING AT STAND 1 OR STAND 3;
- STAND NR 6 ONLY USED FOR PARKING AT THIS STAND WHEN THERE IS NO ACFT PARKING AT STAND 5 OR STAND 7;
- ACFT CODE D/E IS ONLY PARKED AT STAND NR 8 WHEN THERE IS NO ACFT PARKING AT STAND 7 OR STAND 9;
- STAND 10 ONLY USED FOR PARKING WHEN THERE IS NO ACFT PARKING AT STAND 9 OR STAND 11;
- WHEN USING ACFT UP TO CODE D AND EQUIVALENT STAND 10: SELF TAXI-IN TO STAND AND TAXI-OUT FOR DEPARTURE (THIS STAND IS USED FOR PARKING WHEN THERE IS NO ACFT PARKING AT STAND 9 AND STAND 11).

CHANGE: ADDN OF ISOLATED STAND AT TURN PAD OF RWY 06/24.