

NOT TO SCALE



AREA USED FOR ISOLATED STAND. USED FOR ACFT UP TO CODE C AND EQUIVALENT

ELEVATIONS IN METRES

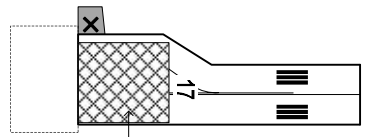

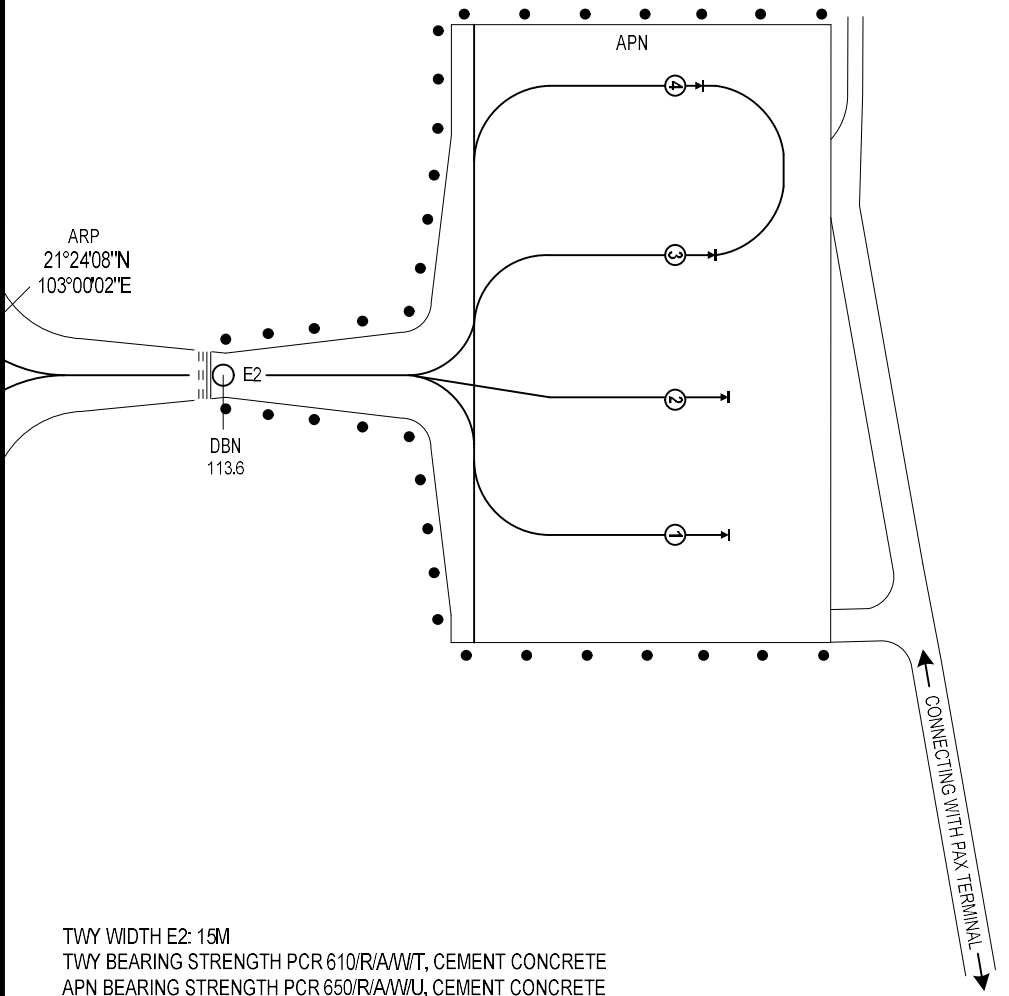


RWY 17/35 2400 X 45 CEMENT CONCRETE

TWY WIDTH E2: 15M
TWY BEARING STRENGTH PCR 610/R/A/W/T, CEMENT CONCRETE
APN BEARING STRENGTH PCR 650/R/A/W/U, CEMENT CONCRETE

- ACFT STANDS 1, 2 USED FOR ACFT A321/ A320/ E190 AND EQUIVALENT (WINGSPAN UP TO BUT NOT INCLUDING 36 M).
- ACFT STANDS 3: USED FOR ACFT A321/ A320/ E190/ ATR72 AND EQUIVALENT (WINGSPAN UP TO BUT NOT INCLUDING 36 M).
- ACFT STAND 4: USED FOR ACFT UP TO ATR72 AND EQUIVALENT (WINGSPAN UP TO INCLUDING 30 M).
* OPERATIONAL LIMITATIONS: ACFT PARKED AT STAND 4 ARE NOT ALLOWED TO SELF-TAXI OUT WHEN THERE IS ACFT PARKING AT STAND 3.

TWY EDGE LIGHTS ON TWY E2
TWY CL LIGHTS: NIL



LEGEND	
VOR CHECKPOINT AND FREQUENCY	DBN 113.6
RWY - HOLDING POSITION (PATTERN A)	
ACFT STANDS	1
TAXILANE MARKING	

CHANGE: ADDN OF AREA USED FOR ISOLATED STAND AT TURN PAD OF RWY 17.