AERODROME CHART - ICAO

10°10'11"N
103°59'35"E

AD ELEV
7M

TWR:	118.6	PRI
	118.725	SRY
GROUND :	121.925	PRI
	121.625	SRY
	121.5	EMERG

AN GIANG/PHU QUOC INTL (VVPQ)

RWY	DIRECTION (TRUE)	THR WGS-84	BEARING STRENGTH
10	096°	10°10'16"N – 103°58'46"E	PCR 680/F/C/X/U
28	276°	10°10'07"N – 104°00'24"E	

ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC


TWYs WIDTH: 25M

* TWYs BEARING STRENGTH:
- A1, A3, S, S4, S6: PCR 850/R/B/X/U, CEMENT CONCRETE
- A2: PCR 680/F/C/X/U, BITUMINOUS CONCRETE
- S1, S2, S8, S9 : PCR 660/R/B/W/U, CEMENT CONCRETE
- S5: PCR 680/F/C/X/U, BITUMINOUS CONCRETE

* APRON BEARING STRENGTH:
- STANDS 7, 8, 9, 10, 11: PCR 660/R/B/W/U, CEMENT CONCRETE
- STANDS 1, 1A, 2, 2A, 3, 4, 4A, 5, 5A, 6, 6A, 12, 13, 13A, 14: PCR 850/R/B/X/U, CEMENT CONCRETE

N

VAR 0°

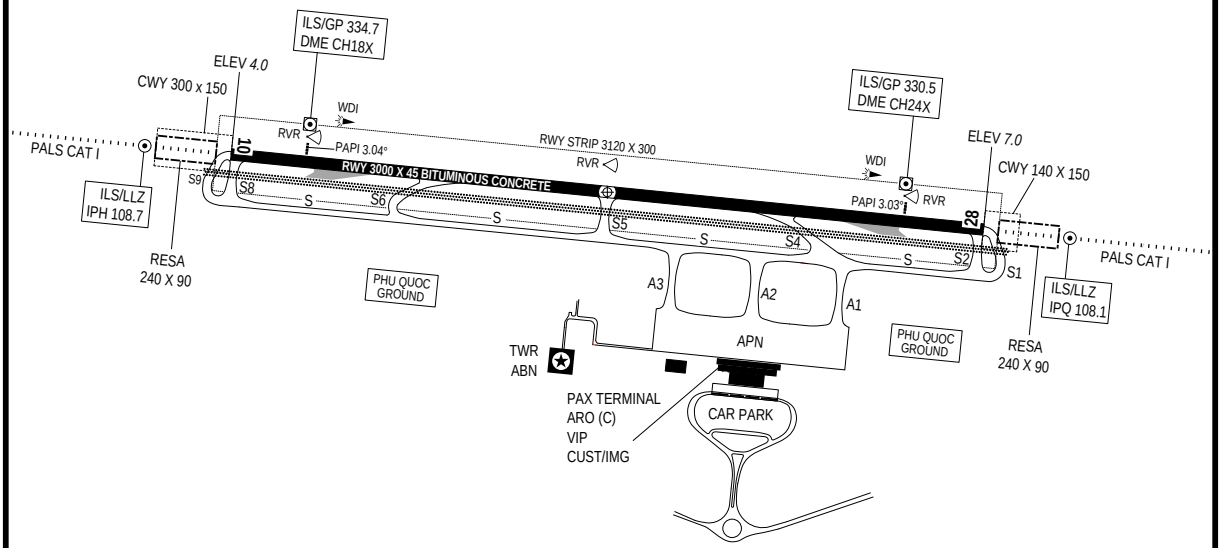

LEGEND	
BUILDINGS	■
RWY-HOLDING POSITION (PATTERN A)	≡≡≡
TWY/RWY EDGE LIGHTS	•
STOP BAR	●●●
RCL LIGHTS	•
ATC SERVICE BOUNDARY (GND)	⋯⋯
ARP	⊕

LIGHTING AIDS THR RWY 10/28



SCALE 1: 30 000


METRES

300 0 500 1000


500 0 1000 2000 3000

FEET

MARKING AIDS RWY 10/28 AND EXIT TWY



LIGHTING AIDS RWY 10/28 AND EXIT TWY



NOT TO SCALE

CHANGE: LOCATION NAME.