APRON 1	PCR 420/R/B/X/U CEMENT CONCRETE
TAXIWAYS	


RWY	DIRECTION (TRUE)	THR WGS-84	BEARING STRENGTH
14	135°	15°24'56"N - 108°41'45"E	PCR 420/R/B/X/U
32	315°	15°23'47"N - 108°42'58"E	

TWYS WIDTH:
E1 25M
E2 153M
E3, E4, E5 23M
E6 84M

ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC.

N


VAR 1°W 2017

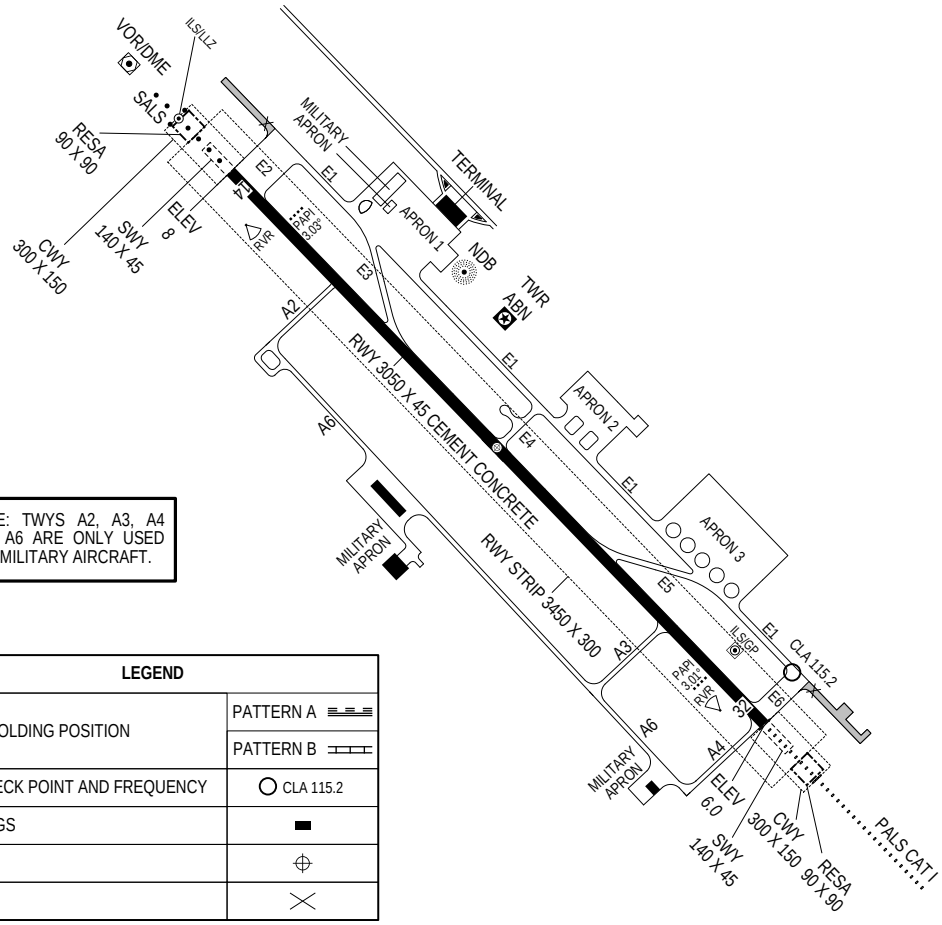

NOTE: TWYS A2, A3, A4 AND A6 ARE ONLY USED FOR MILITARY AIRCRAFT.

LEGEND	
RWY – HOLDING POSITION	PATTERN A
	PATTERN B
VOR CHECK POINT AND FREQUENCY	CLA 115.2
BUILDINGS	
ARP	
CLOSED	

LIGHTING AIDS THR RWY 14/32




SCALE 1: 30 000


METRES 300 0 500 1000

FEET 500 0 1000 2000 3000

MARKING AIDS RWY 14/32 AND EXIT TWY



LIGHTING AIDS RWY 14/32 AND EXIT TWY



NOT TO SCALE

CHANGE: LOCATION NAME.