
AERODROME GROUND MOVEMENT CHART - ICAO

APRON ELEV *30M*

TWR: 118.6

GIA LAI/PHU CAT DOM (VVPC)

ELEVATIONS IN METRES
BEARINGS ARE MAGNETIC




TWYS WIDTH:
E1, E2, E3, E4, E5: 23M
AC1: 18M
AC2: 24M.


- TWYS BEARING STRENGTH:
E1, E3, E4, AC1, AC2: PCR 570/R/A/X/U, CEMENT CONCRETE
E2, E5: PCR 440/R/A/X/U, CEMENT CONCRETE

- APRON BEARING STRENGTH:
STANDS 1, 4: PCR 450/R/A/X/U, CEMENT CONCRETE
STANDS 2, 3: PCR 360/R/A/W/U, CEMENT CONCRETE
STANDS 5, 6, 7 AND 8: PCR 610/R/A/W/U, CEMENT CONCRETE

TWY EDGE LIGHTS ON ALL TWYS

TWY CENTRE LINE LIGHTS: NIL

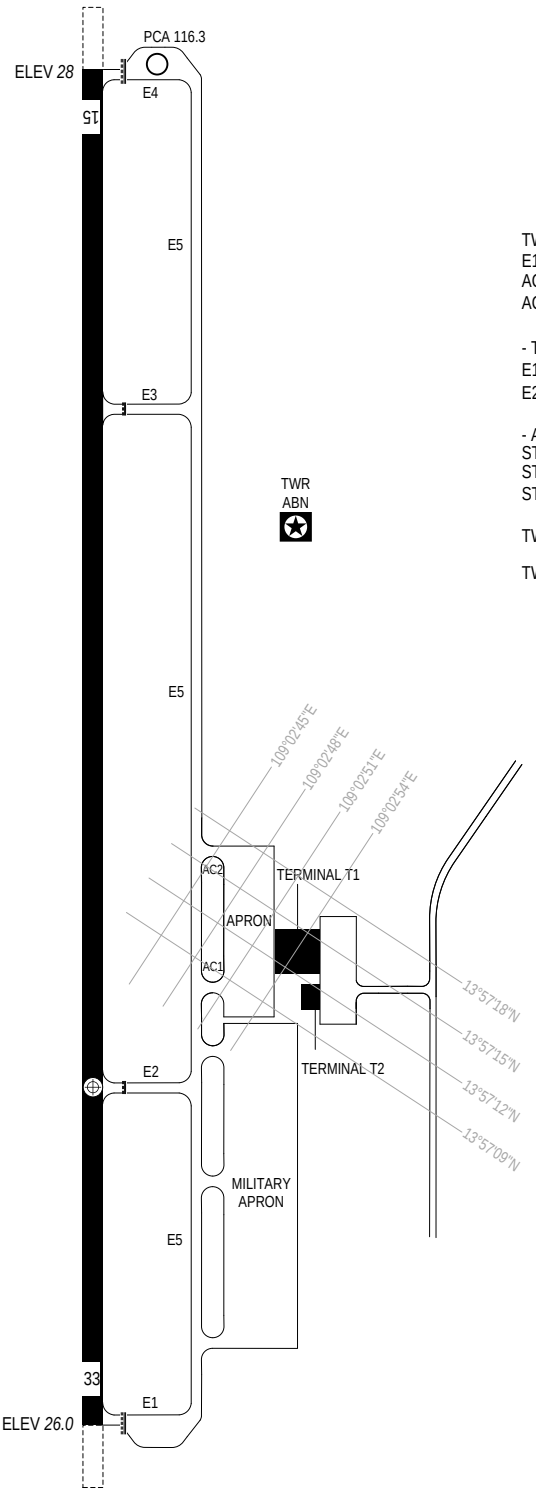

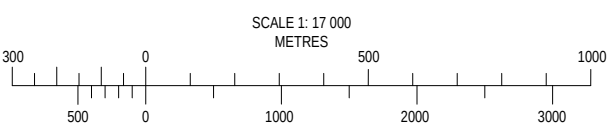

LEGEND	
VOR CHECK POINT AND FREQUENCY	PCA 116.3
BUILDINGS	
RWY-HOLDING POSITION (PATTERN A)	
ARP	

CHANGE: LOCATION NAME.