**AERODROME CHART - ICAO** | 16°02'38"N 108°12'01"E | AD ELEV 9M | APP: 120.45 PRI, APP: 125.45 SRY, TWR: 118.35 PRI, TWR: 118.05 SRY | **DA NANG/DA NANG INTL (VVDN)**

| RWY | DIRECTION (TRUE) | THR WGS-84 | BEARING STRENGTH |
|---|---|---|---|
| 17R | 172° | 16°03'27"N - 108°11'47"E | PCR 460/F/B/X/U |
| 35L | 352° | 16°01'48"N - 108°12'01"E | |
| 17L | 172° | 16°03'37"N - 108°11'53"E | PCR 610/R/A/W/U |
| 35R | 352° | 16°01'45"N - 108°12'09"E | |

TWYS WIDTH:
- G2, G4, W, W2, W4, W5, E, EXTENDED E = 23 M.
- E2, E3, E4, E7 = 31 M.
- E1 = 57 M.
- W1 = 60 M.
- W6 = 152 M.
- G1, G6, E6 = 61 M.

TWYS BEARING STRENGTH:
- G2, G4: PCR 500/F/B/X/U BITUMINOUS CONCRETE
- E1, E2, E3, E4, E6, E7: PCR 670/R/A/W/U CEMENT CONCRETE
- E: PCR 670/R/A/X/U CEMENT CONCRETE
- EXTENDED E (THE PORTION FM STAND 5 TO 1): PCR 770/R/A/W/U CEMENT CONCRETE
- G1, G6, W6: PCR 500/R/B/X/U CEMENT CONCRETE
- W, W1, W2, W4, W5: PCR 470/R/B/X/U CEMENT CONCRETE


APRON BEARING STRENGTH:
- STANDS FM 1 TO 12 AND FM 14 TO 22: PCR 770/R/A/W/U.
- STANDS FM 23 TO 27: PCR 780/R/B/W/U.
- STANDS FM 28 TO 36: PCR 770/R/A/X/U.
- STANDS 3M, 4M, 5M: PCR 300/R/B/W/U.

ALL ARE CEMENT CONCRETE

ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC.

N

VAR 1°W 2016

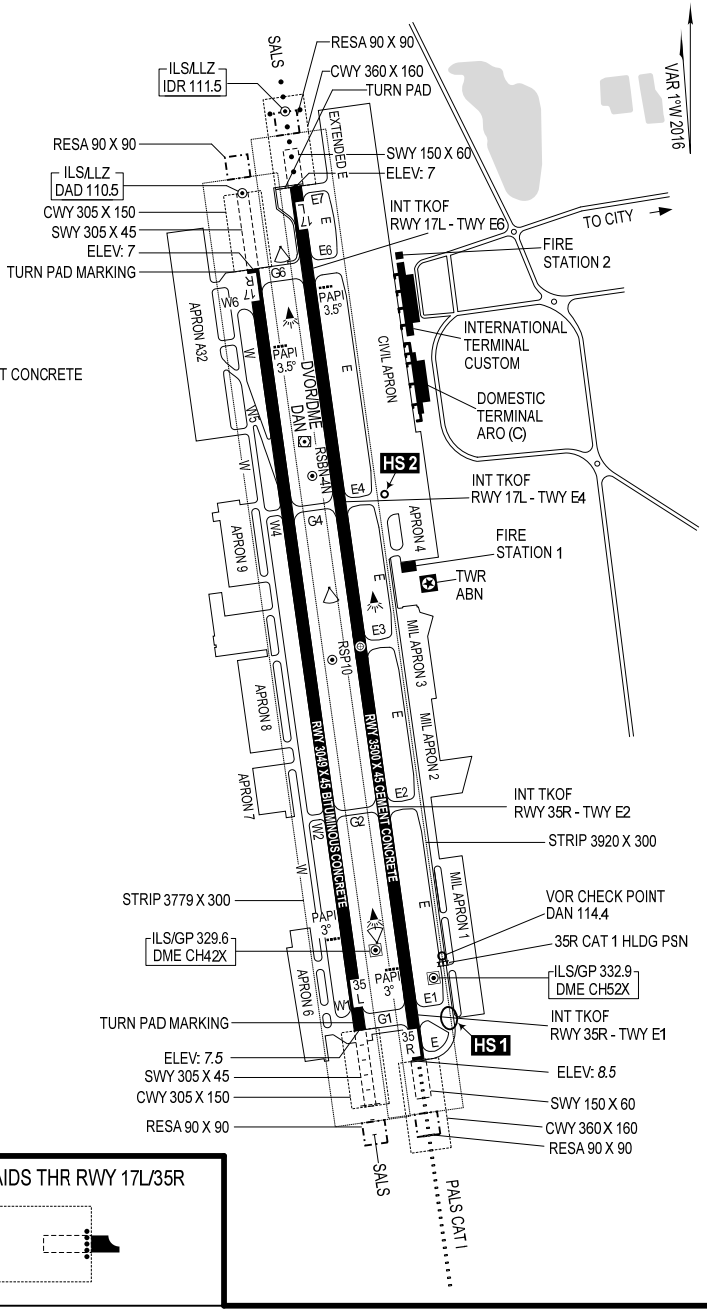



SCALE 1: 30 000

METRES 300 0 500 1000

FEET 500 0 1000 2000 3000

| LEGEND | |
|---|---|
| VOR CHECK POINT | DAN 114.4 |
| HOT SPOT AND NUMBER | HS 1 |
| WIND DIRECTION INDICATOR (WDI) | |
| BUILDINGS | |
| RUNWAY VISUAL RANGE (RVR) | |
| ARP | |
| RUNWAY AHEAD | |


LIGHTING AIDS THR RWY 17R/35L



LIGHTING AIDS THR RWY 17L/35R



MARKING AIDS RWY 17R/35L AND EXIT TWY

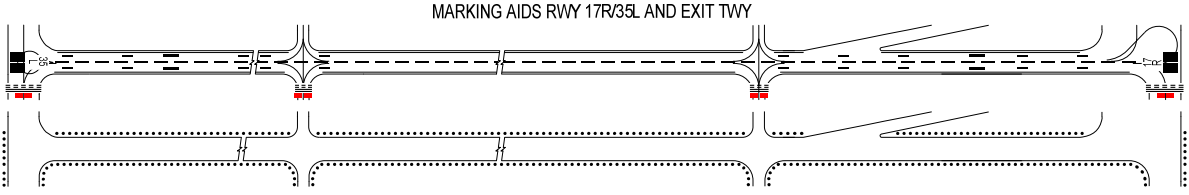


METRES 0 100 200 300

FEET 0 200 500 1000

LIGHTING AIDS RWY 17R/35L AND EXIT TWY

MARKING AIDS RWY 17L/35R AND EXIT TWY

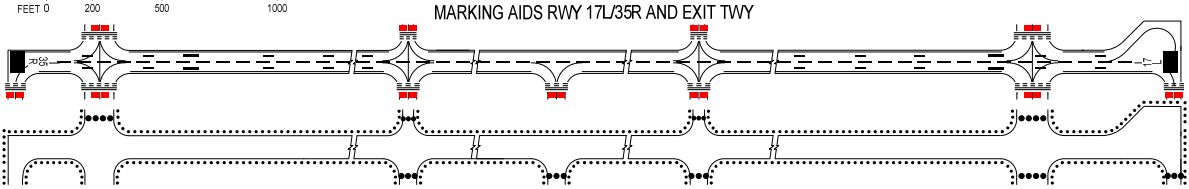

LIGHTING AIDS RWY 17L/35R AND EXIT TWY

CHANGE: ADDN OF RUNWAY AHEAD.