
AERODROME GROUND MOVEMENT CHART - ICAO

APRON ELEV
13M

TWR:	118.2	PRI
	124.35	SRY
	121.5	EMERG

KHANH HOA/CAM RANH INTL (VVCR)

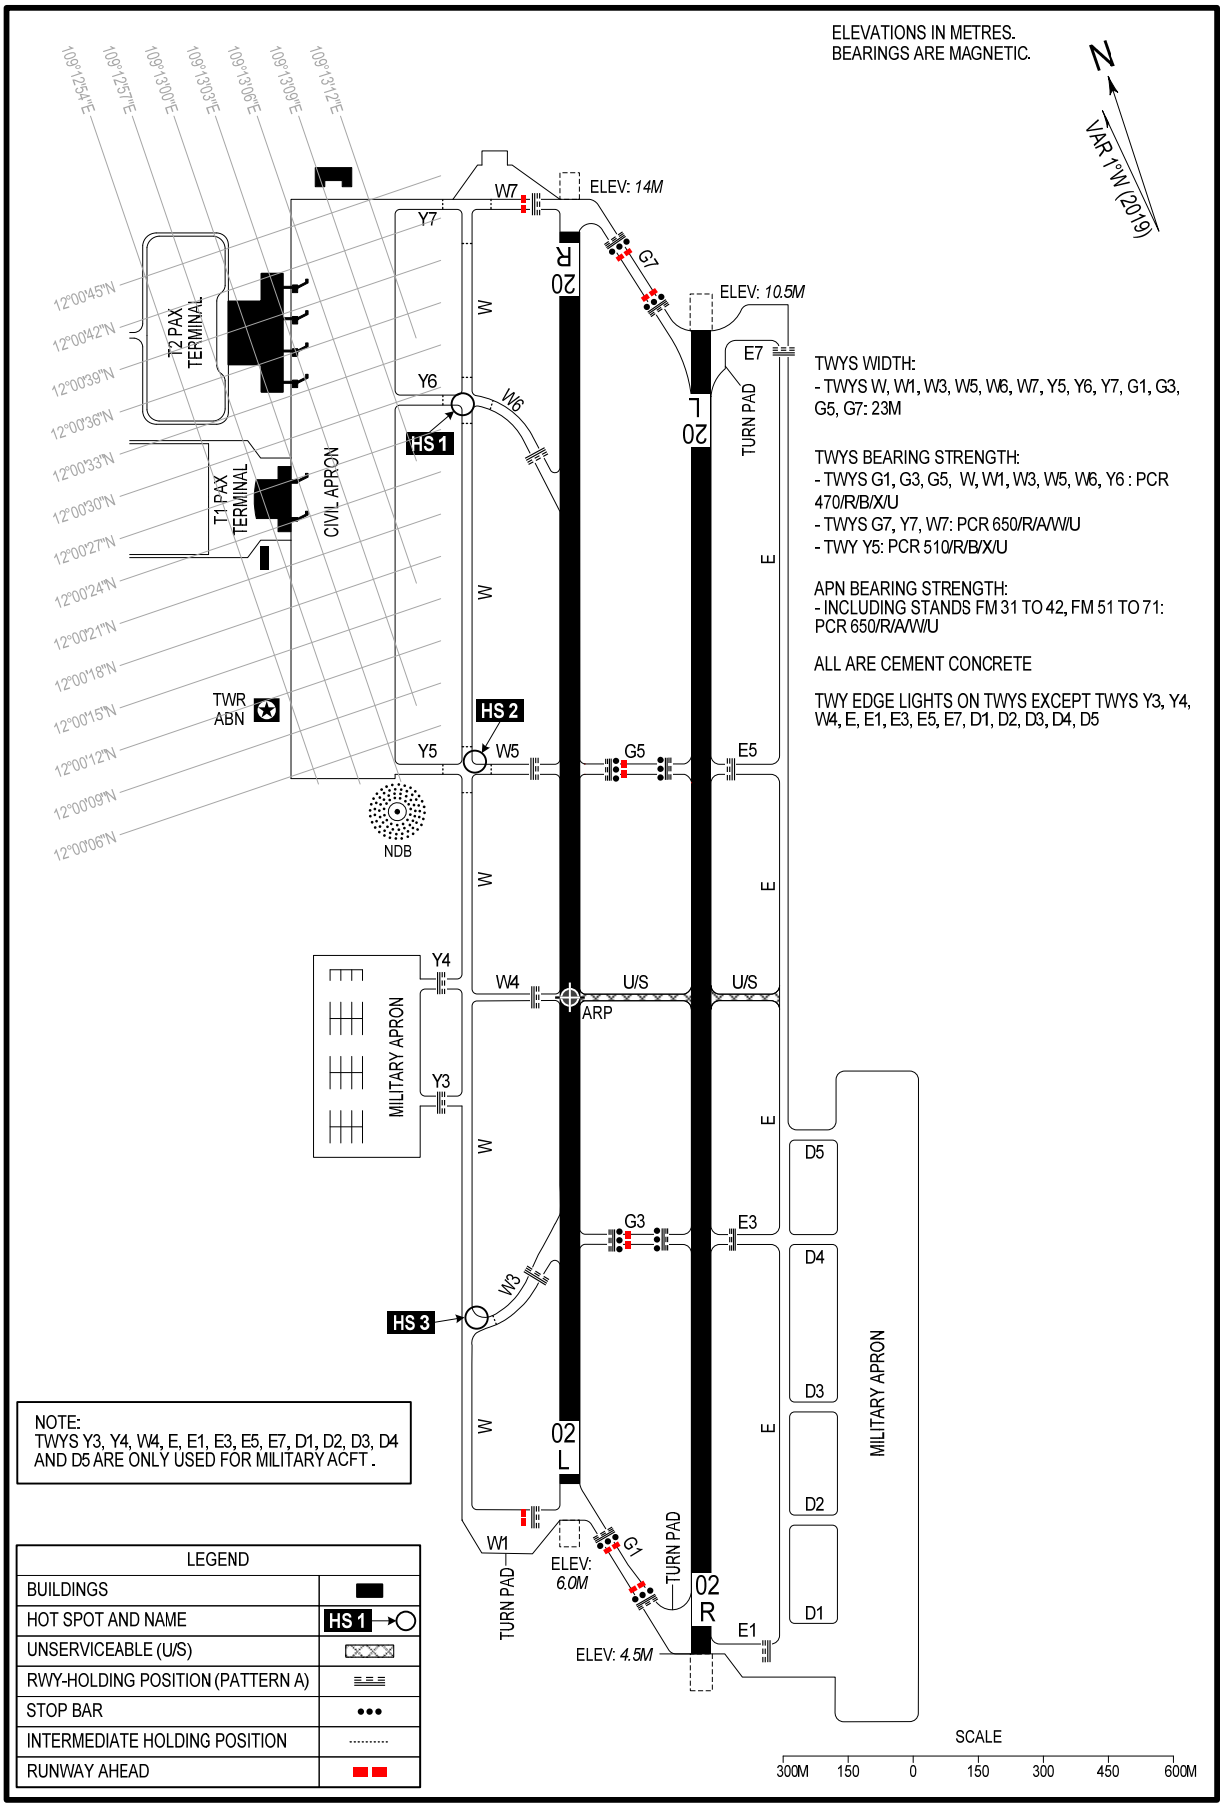

TWYS WIDTH:
- TWYS W, W1, W3, W5, W6, W7, Y5, Y6, Y7, G1, G3, G5, G7: 23M

TWYS BEARING STRENGTH:
- TWYS G1, G3, G5, W, W1, W3, W5, W6, Y6 : PCR 470/R/B/X/U
- TWYS G7, Y7, W7: PCR 650/R/A/W/U
- TWY Y5: PCR 510/R/B/X/U

APN BEARING STRENGTH:
- INCLUDING STANDS FM 31 TO 42, FM 51 TO 71: PCR 650/R/A/W/U

ALL ARE CEMENT CONCRETE

TWY EDGE LIGHTS ON TWYS EXCEPT TWYS Y3, Y4, W4, E, E1, E3, E5, E7, D1, D2, D3, D4, D5

NOTE:
TWYS Y3, Y4, W4, E, E1, E3, E5, E7, D1, D2, D3, D4 AND D5 ARE ONLY USED FOR MILITARY ACFT.

LEGEND	
BUILDINGS	
HOT SPOT AND NAME	HS 1
UNSERVICEABLE (U/S)	
RWY-HOLDING POSITION (PATTERN A)	
STOP BAR	
INTERMEDIATE HOLDING POSITION	
RUNWAY AHEAD	

CHANGE: SUSPENSION OF CAM RANH GCU OPERATIONS.