
CHANGE: AMA.

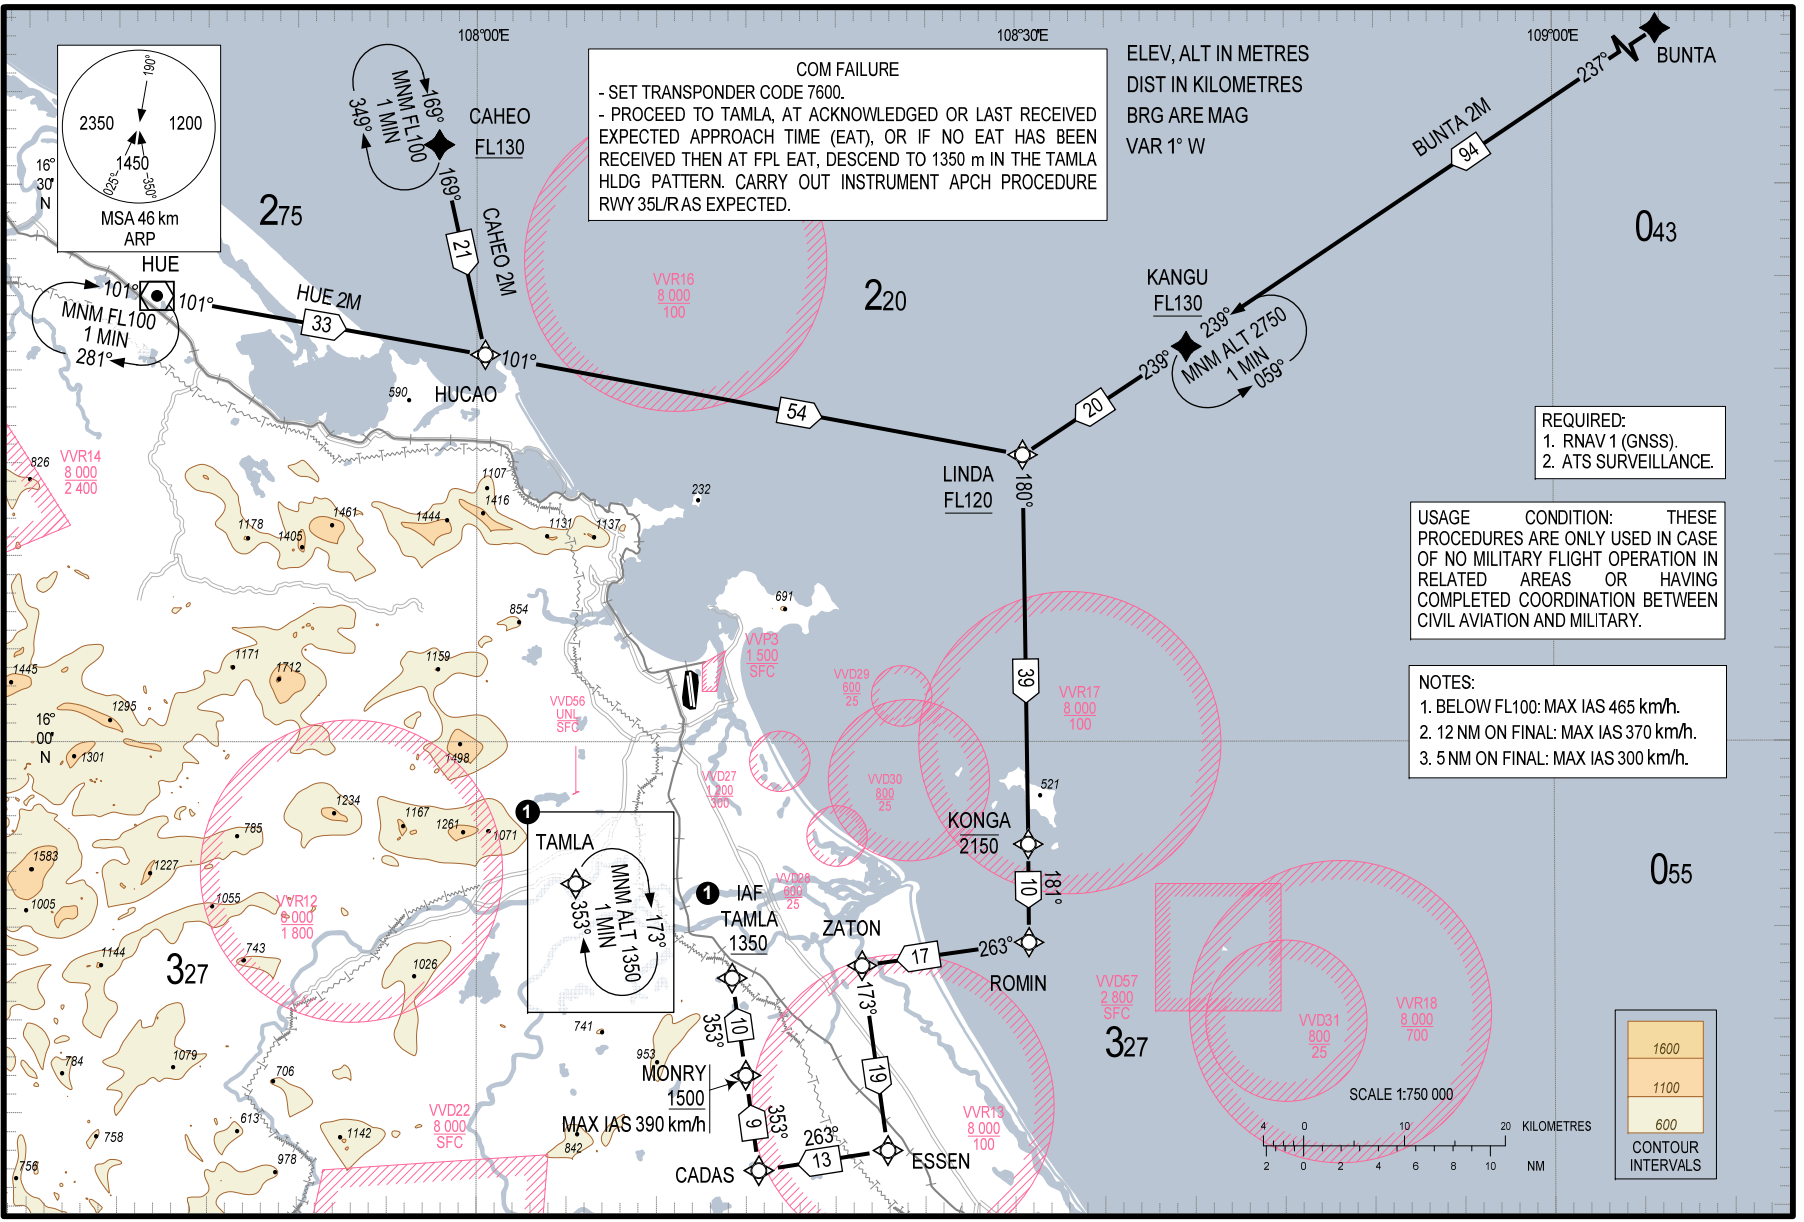

REQUIRED:
1. RNAV 1 (GNSS).
2. ATS SURVEILLANCE.

USAGE CONDITION: THESE PROCEDURES ARE ONLY USED IN CASE OF NO MILITARY FLIGHT OPERATION IN RELATED AREAS OR HAVING COMPLETED COORDINATION BETWEEN CIVIL AVIATION AND MILITARY.

NOTES:
1. BELOW FL100: MAX IAS 465 km/h.
2. 12 NM ON FINAL: MAX IAS 370 km/h.
3. 5 NM ON FINAL: MAX IAS 300 km/h.

TRANSITION ALTITUDE
2750

APP	120.45 PRI
	125.45 SRY
TWR	118.35 PRI
	118.05 SRY

STANDARD ARRIVAL CHART – INSTRUMENT (STAR) – ICAO

DA NANG/DA NANG INTL (VVDN)
RNAV RWY 35L/R
HUE 2M, CAHEO 2M, BUNTA 2M