
AERODROME GROUND MOVEMENT CHART - ICAO

APRON ELEV *7M*

TWR: 118.9

DAK LAK/TUY HOA DOM (VVTH)

ELEVATIONS IN METRES
BEARINGS ARE MAGNETIC

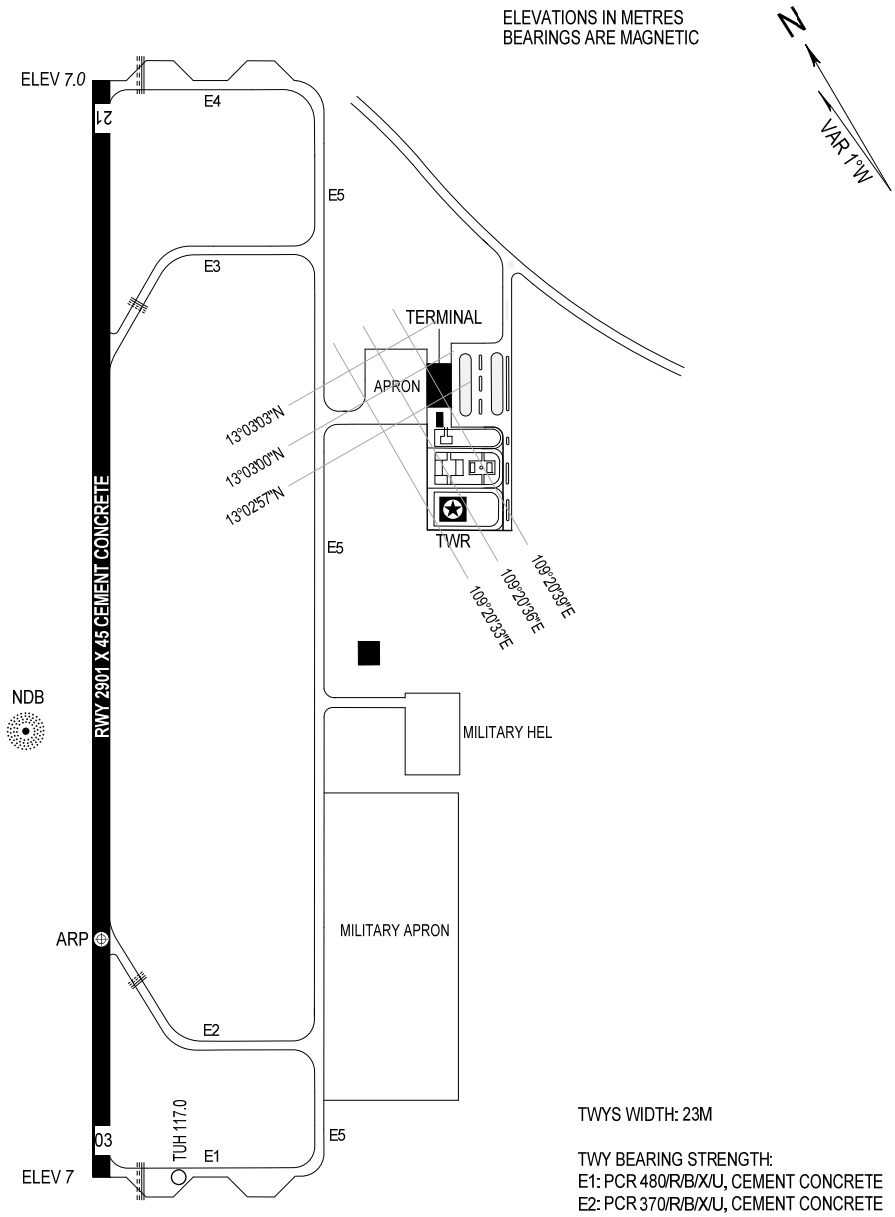

TWYS WIDTH: 23M

TWY BEARING STRENGTH:
E1: PCR 480/R/B/X/U, CEMENT CONCRETE
E2: PCR 370/R/B/X/U, CEMENT CONCRETE
E3: PCR 480/R/B/X/U, CEMENT CONCRETE
E4: PCR 480/R/B/X/U, CEMENT CONCRETE
E5: PCR 480/R/B/X/U, CEMENT CONCRETE

APRON BEARING STRENGTH:
APRON: PCR 620/R/A/X/U, CEMENT CONCRETE

TWY EDGE LIGHTS: E1, E2, E3, E4, E5

TWY CENTRE LINE LIGHTS: NIL

VOR/DME

NOTE:
TAX PROC: AFT LDG-TWY E2/E1-TWY E5-APN.

SCALE 1: 20 000
METRES
300 0 500 1000
500 0 1000 2000 3000
FEET

LEGEND	
ACFT STANDS	1
BUILDINGS	▬
TWY LIGHTS	●
RWY-HOLDING POSITION (PATTERN A)	
VOR CHECK POINT AND FREQUENCY	◯ TUH 117.0

CHANGE: ADDN OF VOR CHECK POINT AND FREQUENCY.