
AERODROME GROUND MOVEMENT CHART - ICAO

APRON ELEV ***2M***

TWR: 118.3

NGHE AN/VINH DOM (VVVH)

ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

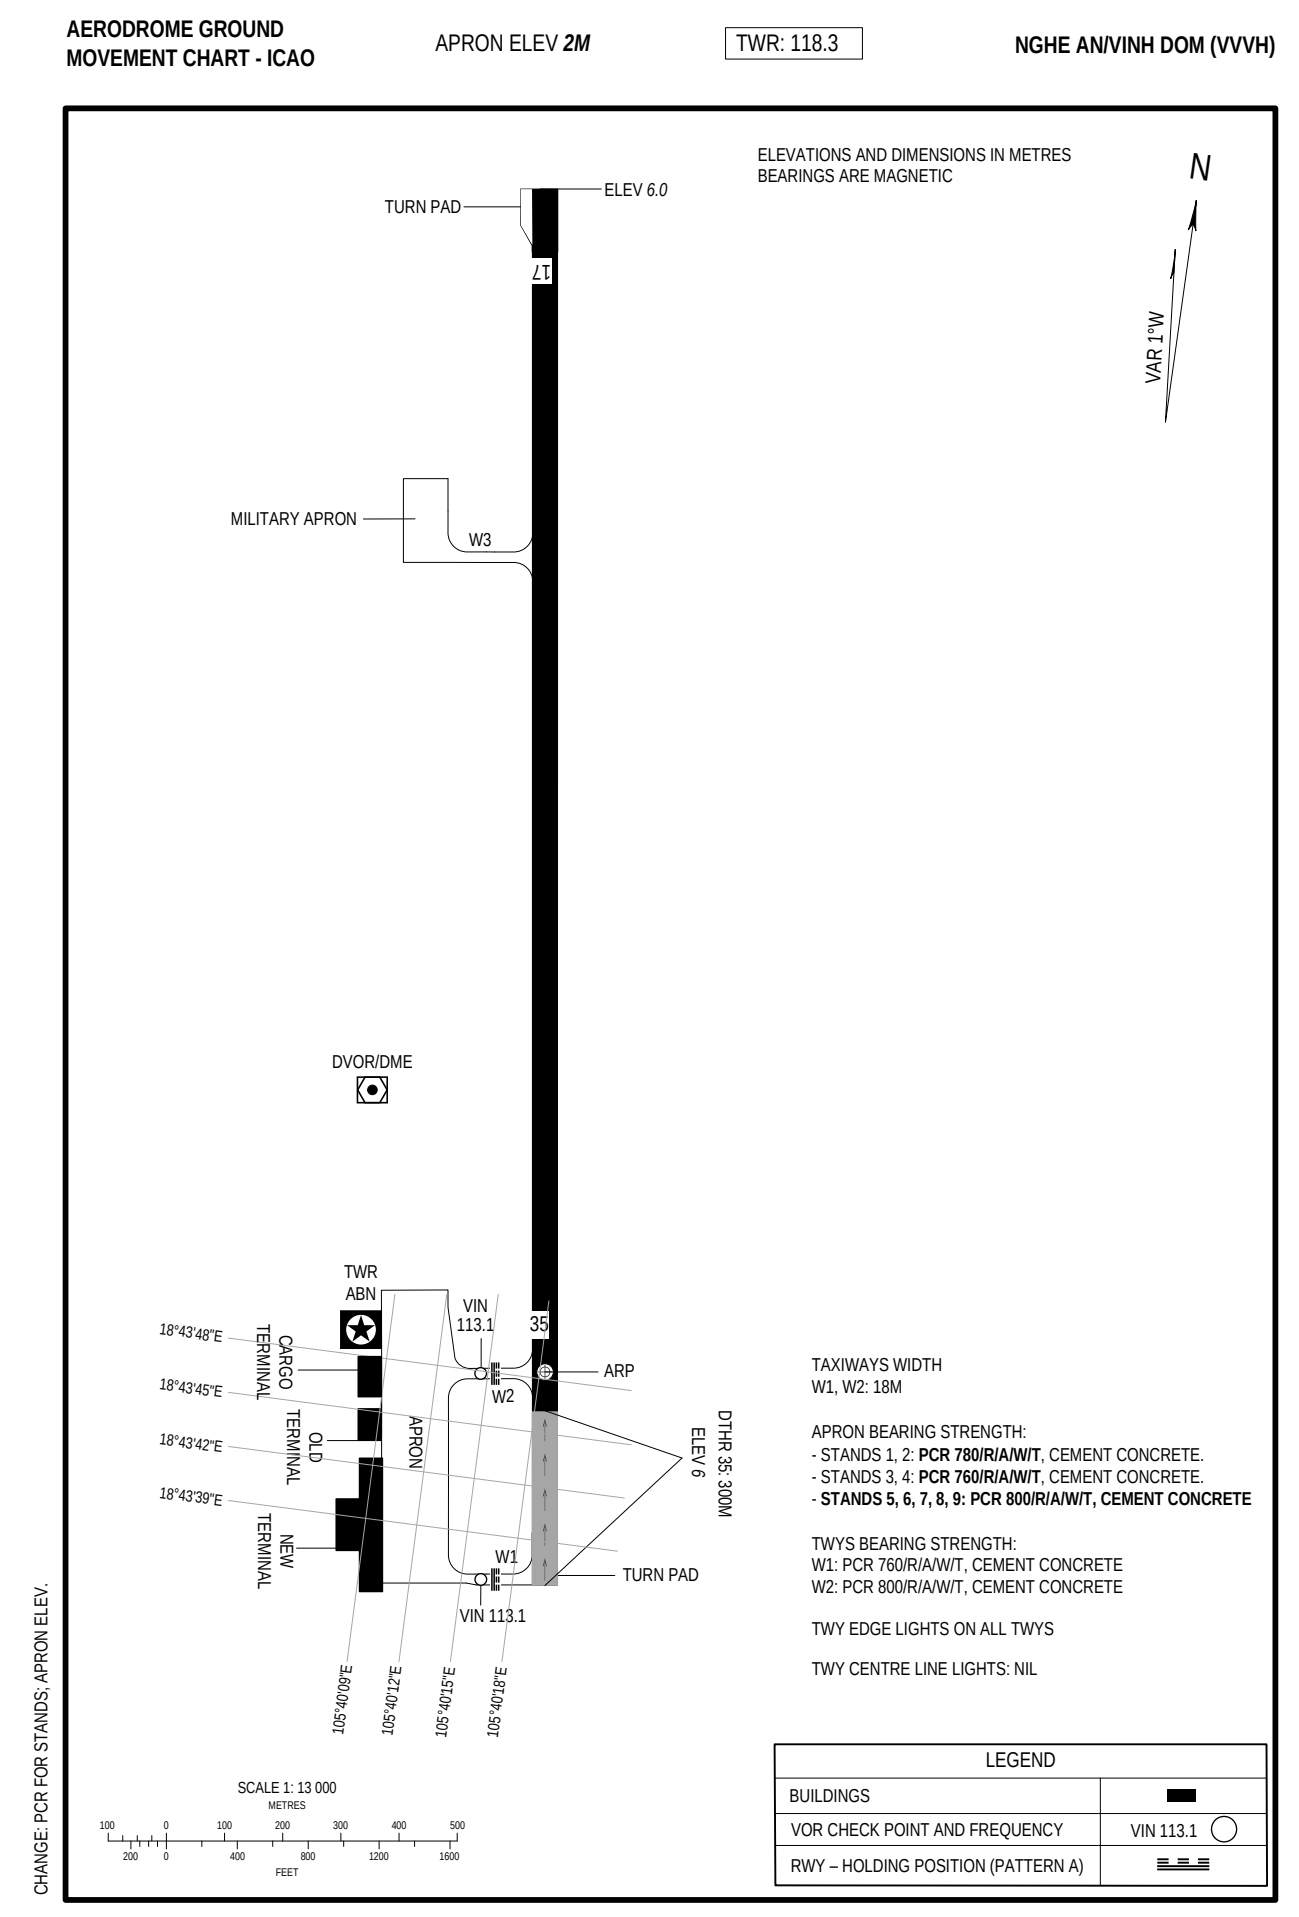

TAXIWAYS WIDTH
W1, W2: 18M

APRON BEARING STRENGTH:
- STANDS 1, 2: **PCR 780/R/A/W/T**, CEMENT CONCRETE.
- STANDS 3, 4: **PCR 760/R/A/W/T**, CEMENT CONCRETE.
- **STANDS 5, 6, 7, 8, 9: PCR 800/R/A/W/T, CEMENT CONCRETE**

TWYS BEARING STRENGTH:
W1: PCR 760/R/A/W/T, CEMENT CONCRETE
W2: PCR 800/R/A/W/T, CEMENT CONCRETE

TWY EDGE LIGHTS ON ALL TWYS

TWY CENTRE LINE LIGHTS: NIL

LEGEND	
BUILDINGS	■
VOR CHECK POINT AND FREQUENCY	VIN 113.1 ◯
RWY – HOLDING POSITION (PATTERN A)	═ ═ ═

CHANGE: PCR FOR STANDS; APRON ELEV.