
ELEVATIONS AND DIMENSION IN METRES
BEARINGS ARE MAGNETIC

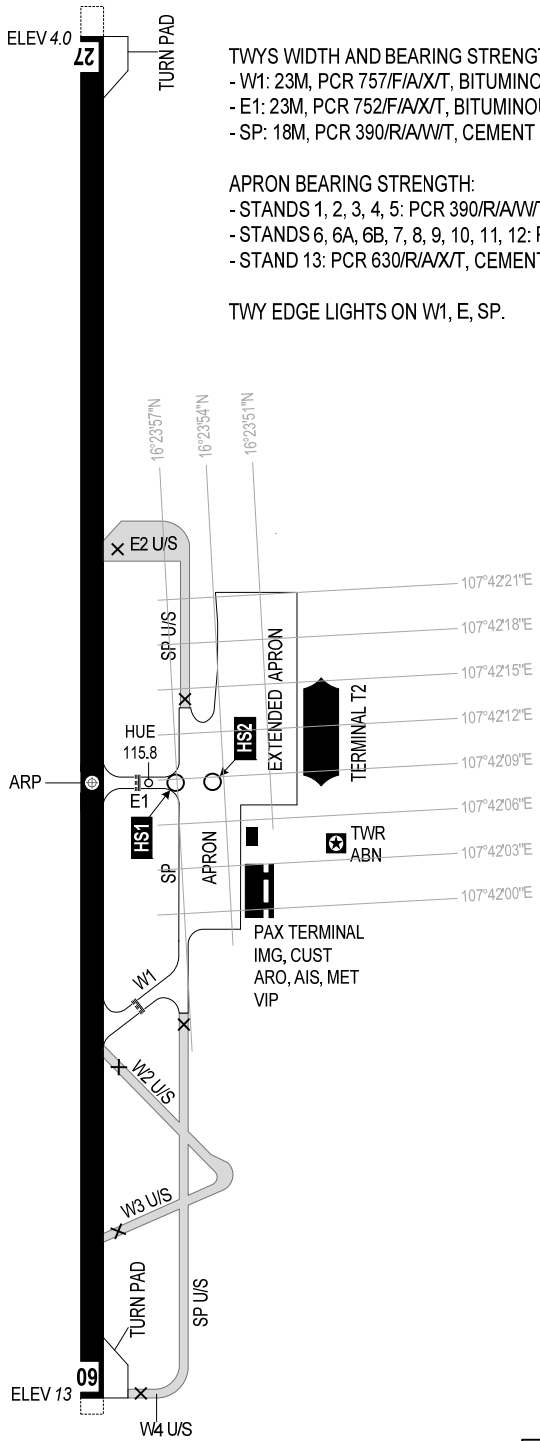


TWYS WIDTH AND BEARING STRENGTH:
- W1: 23M, PCR 757/F/A/X/T, BITUMINOUS CONCRETE
- E1: 23M, PCR 752/F/A/X/T, BITUMINOUS CONCRETE
- SP: 18M, PCR 390/R/A/W/T, CEMENT CONCRETE


APRON BEARING STRENGTH:
- STANDS 1, 2, 3, 4, 5: PCR 390/R/A/W/T, CEMENT CONCRETE
- STANDS 6, 6A, 6B, 7, 8, 9, 10, 11, 12: PCR 630/R/A/X/T, CEMENT CONCRETE
- STAND 13: PCR 630/R/A/X/T, CEMENT CONCRETE

TWY EDGE LIGHTS ON W1, E, SP.

**HS1:** INTERSECTION BETWEEN TWY E1, TWY SP AND TAXILANE D1.
**HS2:** INTERSECTION BETWEEN TAXILANE D AND TAXILANE D1.

| LEGEND | |
|---|---|
| VOR CHECK POINT AND FREQUENCY | HUE 115.8 |
| HOT SPOT AND NAME | HS1 |
| BUILDINGS | |
| RWY-HOLDING POSITION (PATTERN A) | |
| UNSERVICABLE (U/S) | |
| CLOSED | |

SCALE 1: 15 000
METRES




CHANGES: ADJUSTMENT OF PCR OF TWY AND STANDS; ADDN VOR CHECKPOINT.