
AERODROME CHART - ICAO | 10°49'14"N 106°39'39"E | AD ELEV *10M* | TWR: 118.7 | **HO CHI MINH/TAN SON NHAT INTL (VVTS)**

RWY	DIRECTION (TRUE)	THR WGS-84	BEARING STRENGTH
07L	069°	10°48'54"N 106°38'14"E	PCR 1010/R/B/W/U
25R	249°	10°49'29"N 106°39'47"E	
07R	069°	10°48'41"N 106°38'13"E	PCR 790/R/B/X/U
07R (DISPLACED)	069°	10°48'50"N 106°38'36"E	
25L	249°	10°49'25"N 106°40'10"E	

ELEVATIONS AND DIMENSIONS IN METRES
BEARING ARE MAGNETIC

COMMUNICATION FACILITES
TAN SON NHAT GROUND 1: 121.9 MHz PRI, 121.975 MHz SRY, 121.5 MHz EMERG
TAN SON NHAT GROUND 2: 121.6 MHz PRI, 121.75 MHz SRY, 121.5 MHz EMERG

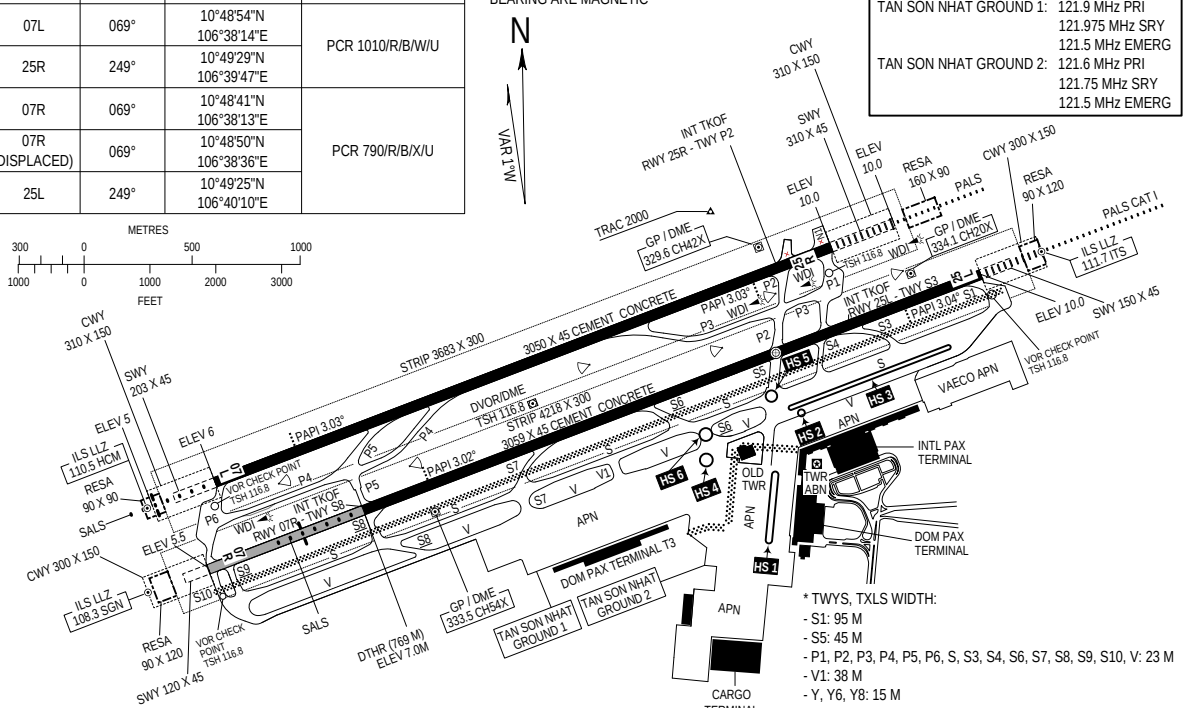

* APRON BEARING STRENGTH:
- STANDS 1 TO 8, 1A: PCR 990/R/B/W/U
- STANDS 11, 12, 16 TO 22, 1E, 2E: PCR 790/R/B/X/U
- STANDS 9, 10, 13, 14, 15: PCR 990/R/B/W/U
- STANDS 23 TO 28: PCR 670/R/B/X/U
- STANDS 29 TO 32: PCR 790/R/B/X/U
- STANDS 33 TO 46: PCR 990/R/B/W/U
- STANDS 47 TO 54: PCR 670/R/B/X/U
- STANDS 71 TO 86, 77A, 79A, 81A: PCR 990/R/B/W/U
- STANDS 91 TO 102, 103, 104, 103A, 103B, 104A, 104B: PCR 990/R/B/W/U
- **STAND 6H: PCR 370/R/B/W/T**
- **STANDS 1H, 2H, 3H: PCR: 300/R/A/W/T**

ALL ARE CEMENT CONCRETE


* TWYS, TXLS BEARING STRENGTH:
- P1, P2, P5, P6, S1, S3, S4, S5, S6, S7, S8, S9, S10, V: PCR 790/R/B/X/U
- P3, P4, S, V1: PCR 1010/R/B/W/U
- Y, Y1, Y3, Y6, Y7, Y8: PCR 990/R/B/W/U
- Y2, Y4: PCR 670/R/B/X/U

ALL ARE CEMENT CONCRETE


* TWYS, TXLS WIDTH:
- S1: 95 M
- S5: 45 M
- P1, P2, P3, P4, P5, P6, S, S3, S4, S6, S7, S8, S9, S10, V: 23 M
- V1: 38 M
- Y, Y6, Y8: 15 M
- Y1, Y2, Y3, Y4, Y7: 23 M

LEGEND	
RUNWAY VISUAL RANGE (RVR)	
HOT SPOT AND NAME	HS 1
CLOSED	
BUILDING	
ATC SERVICE BOUNDARY (GND)	
RWY-HOLDING POSITION (PATTERN A)	
STOP BAR	
ARP	
RUNWAY AHEAD	1
MANDATORY INSTRUCTION MARKINGS (07R; 07R-25L; 25L-07R; 25L)	2


LIGHTING AIDS THR RWY 07L/25R



LIGHTING AIDS THR RWY 07R/25L




MARKING AIDS RWY 07L/25R AND EXIT TWY

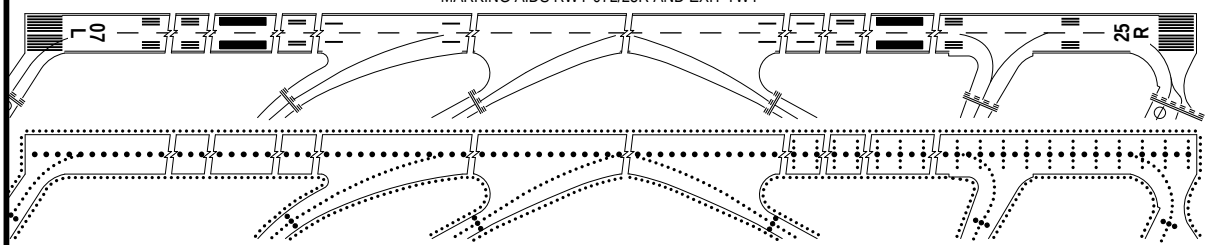

LIGHTING AIDS RWY 07L/25R AND EXIT TWY

MARKING AIDS RWY 07R/25L AND EXIT TWY

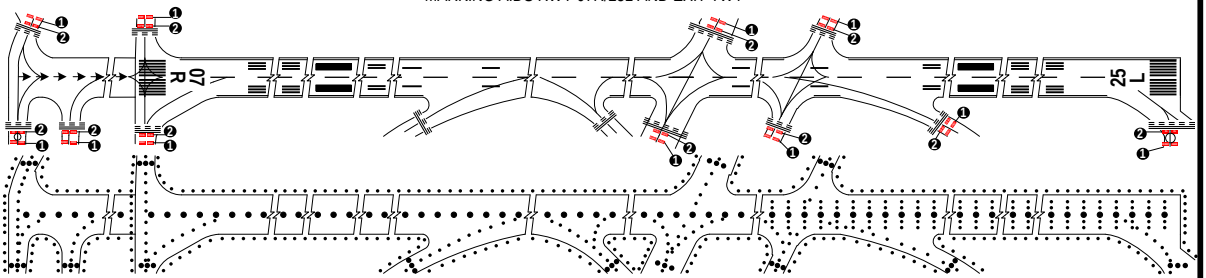

LIGHTING AIDS RWY 07R/25L AND EXIT TWY

CHANGE: STANDS 1H, 2H, 3H, 6H BEARING STRENGTH.