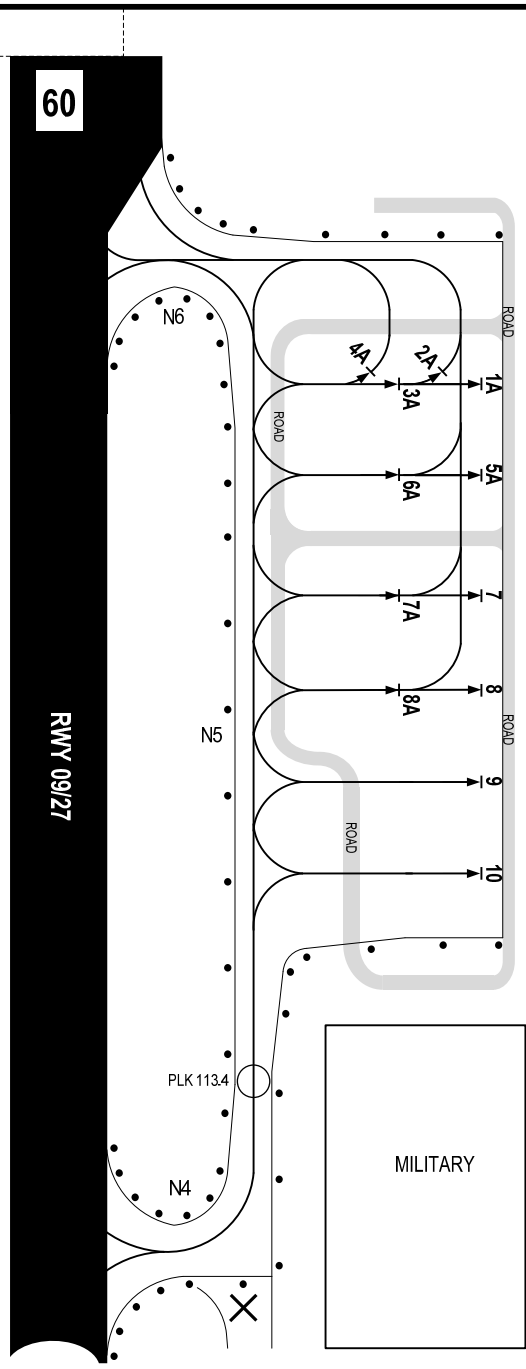


ELEVATIONS IN METRES

VAR 1°W - 2017

N

- TWYS WIDTH:
+ N4: 25 M
+ N5 (FM N4 TO N6): 18 M
+ N6: 18 M
- TWYS AND APN BEARING STRENGTH: PCR 630/R/B/W/U, CEMENT CONCRETE.

- ACFT STANDS:
+ 1A, 5A, 7, 8, 9, 10: USED FOR ACFT UP TO A321 (CODE C) AND EQUIVALENT; ACFT SELF-TAXI INTO STANDS, TOW/PUSH OUT STANDS.
+ 3A, 6A, 7A, 8A: USED FOR ACFT UP TO A321 (CODE C) AND EQUIVALENT; ACFT SELF-TAXI IN/OUT STANDS OR ACFT SELF-TAXI IN, TOW/PUSH OUT STANDS.
+ 2A, 4A: USED FOR ACFT CODE A; ACFT SELF-TAXI IN/OUT STANDS.

* OPERATIONAL LIMITATIONS:

- WHEN THERE IS AN ACFT OPERATING AT STAND 1A OR 2A; STANDS 3A, 6A, 7A, 8A SHALL NOT BE OPERATED FOLLOWING THE SELF-TAXI PROCEDURE (ONLY TOW/PUSH-BACK PROCEDURE INTO TWY N5 IS USED).

- WHEN THERE IS AN ACFT OPERATING AT STAND 5A; STANDS 6A, 7A, 8A SHALL NOT BE OPERATED FOLLOWING THE SELF-TAXI PROCEDURE (ONLY TOW/PUSH-BACK PROCEDURE INTO TWY N5 IS USED).


- WHEN THERE IS AN ACFT OPERATING AT STAND 7; STANDS 7A SHALL NOT BE OPERATED AND VICE VERSA.

- WHEN THERE IS AN ACFT OPERATING AT STAND 8; STAND 8A SHALL NOT BE OPERATED AND VICE VERSA.
- WHEN THERE IS AN ACFT OPERATING AT STAND 1A OR 3A; STANDS 2A, 4A SHALL NOT BE OPERATED AND VICE VERSA.
- IN STORM SITUATIONS, ACFT NEED TO USE TIE-DOWN STANDS: STANDS 3A, 6A, 7A, 8A ARE USED FOR ACFT TIE-DOWN.
- ACFT ARE ONLY ALLOWED TO TOW/PUSH INTO TWY N5 WHEN THERE ARE NO OTHER ACFT LANDING/TAKING OFF ON RWY 09/27.
- ACFT ARE ONLY ALLOWED TO START THE ENGINES AFTER COMPLETING THE TOWING/PUSHING PROCEDURES AND WHEN THE TOW TRACTOR HAS BEEN DISCONNECTED FROM THE ACFT (THE ACFT MUST NOT STARTED THE ENGINES DURING THE TOWING/PUSHING PROCESS), EXCEPT IN CASE WHERE ACFT REQUIRES SUPPORT FACILITIES TO START THE ENGINES.
- WHEN AN ACFT IS TAXIING IN OR OUT ON THE APRON, VEHICLES OPERATING ON THE SERVICE ROAD MUST MOVE TO SAFE POSITION, ENSURING A SAFE DISTANCE ACCORDING TO REGULATIONS FOR TAXIING ACFT.


* REFER TO TEXTUAL SECTION FOR ACFT OPERATIONAL PROCEDURES AND COORDINATES OF ACFT STANDS.

* WHEN APPLY TAXIING PROCEDURES, PILOT ARE REQUESTED STRICTLY FOLLOW ATC'S CLEARANCES.

LEGEND	
ACFT STANDS	1
TAXILANE MARKING	
BUILDINGS	
TWY LIGHTS	
SERVICE ROAD	ROAD
CLOSED	
VOR CHECK POINT AND FREQUENCY	PLK 113.4

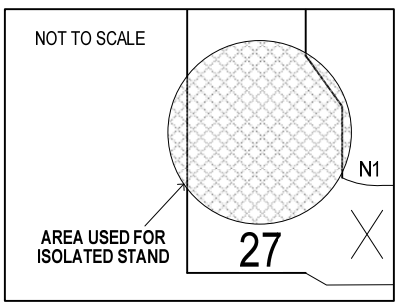

SCALE 1: 3 500



CHANGES: ADJUSTMENT OF OPERATIONAL LIMITATIONS; ADDN OF VOR CHECK POINT AND FREQUENCY.