

AERODROME CHART - ICAO

10°05'02"N
105°42'36"E

AD ELEV 3M

TWR: 118.8

CAN THO/CAN THO INTL (VVCT)

RWY	DIRECTION (TRUE)	THR WGS-84	BEARING STRENGTH
06	060°	10°04'37"N 105°41'51"E	RWY AND TWY S4 PCN 76/F/C/X/T
24	240°	10°05'26"N 105°43'17"E	

ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC


EAST SEA

N
VAR 0° - 2019

TAXIWAY WIDTH S4: 23M



NOTES:

- RENAME OF TWY NS TO S4;
- TAXIWAYS S, S1, S2, S3, S5 AND S6 (EXCEPT TURN-PAD) FOR MILITARY ONLY, ARE NOT USED FOR CIVIL AVIATION OPERATION.

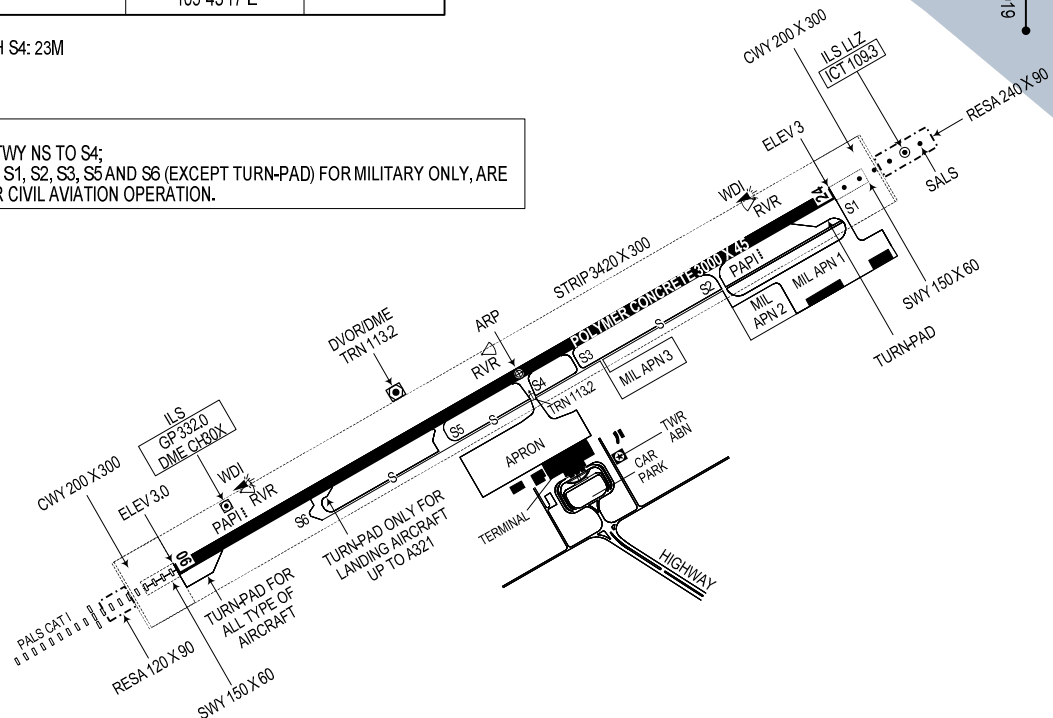


LEGEND


VOR CHECK POINT AND FREQUENCY	TRN 113.2
RWY/TWY EDGE LIGHTS	•
ARP	⊕
BUILDINGS	■
RWY-HOLDING POSITION	≡≡≡

LIGHTING AIDS
THR RWY 06/24

MARKING AIDS RWY 06/24 AND EXIT TWY



LIGHTING AIDS RWY 06/24 AND EXIT TWY

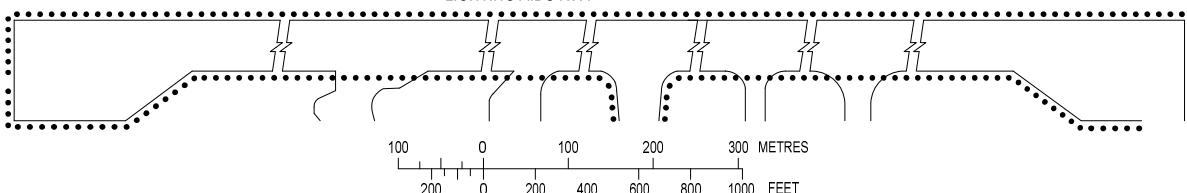

CHANGES: ADDITION OF VOR CHECK POINT AND WIND DIRECTION INDICATOR (WDI); ELEV OF THR 24 (ROUNDED DOC 10066).