
STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE
2750 m

TMC: 125.1 PRI
126.575 SRY
ARR: 121.0 PRI
120.075 SRY
TWR: 118.4 PRI
118.9 SRY

HA NOI/NOI BAI INTL (VVNB)
RWY 11L/R, 29L/R
KADGA 3A, KADGA 3B

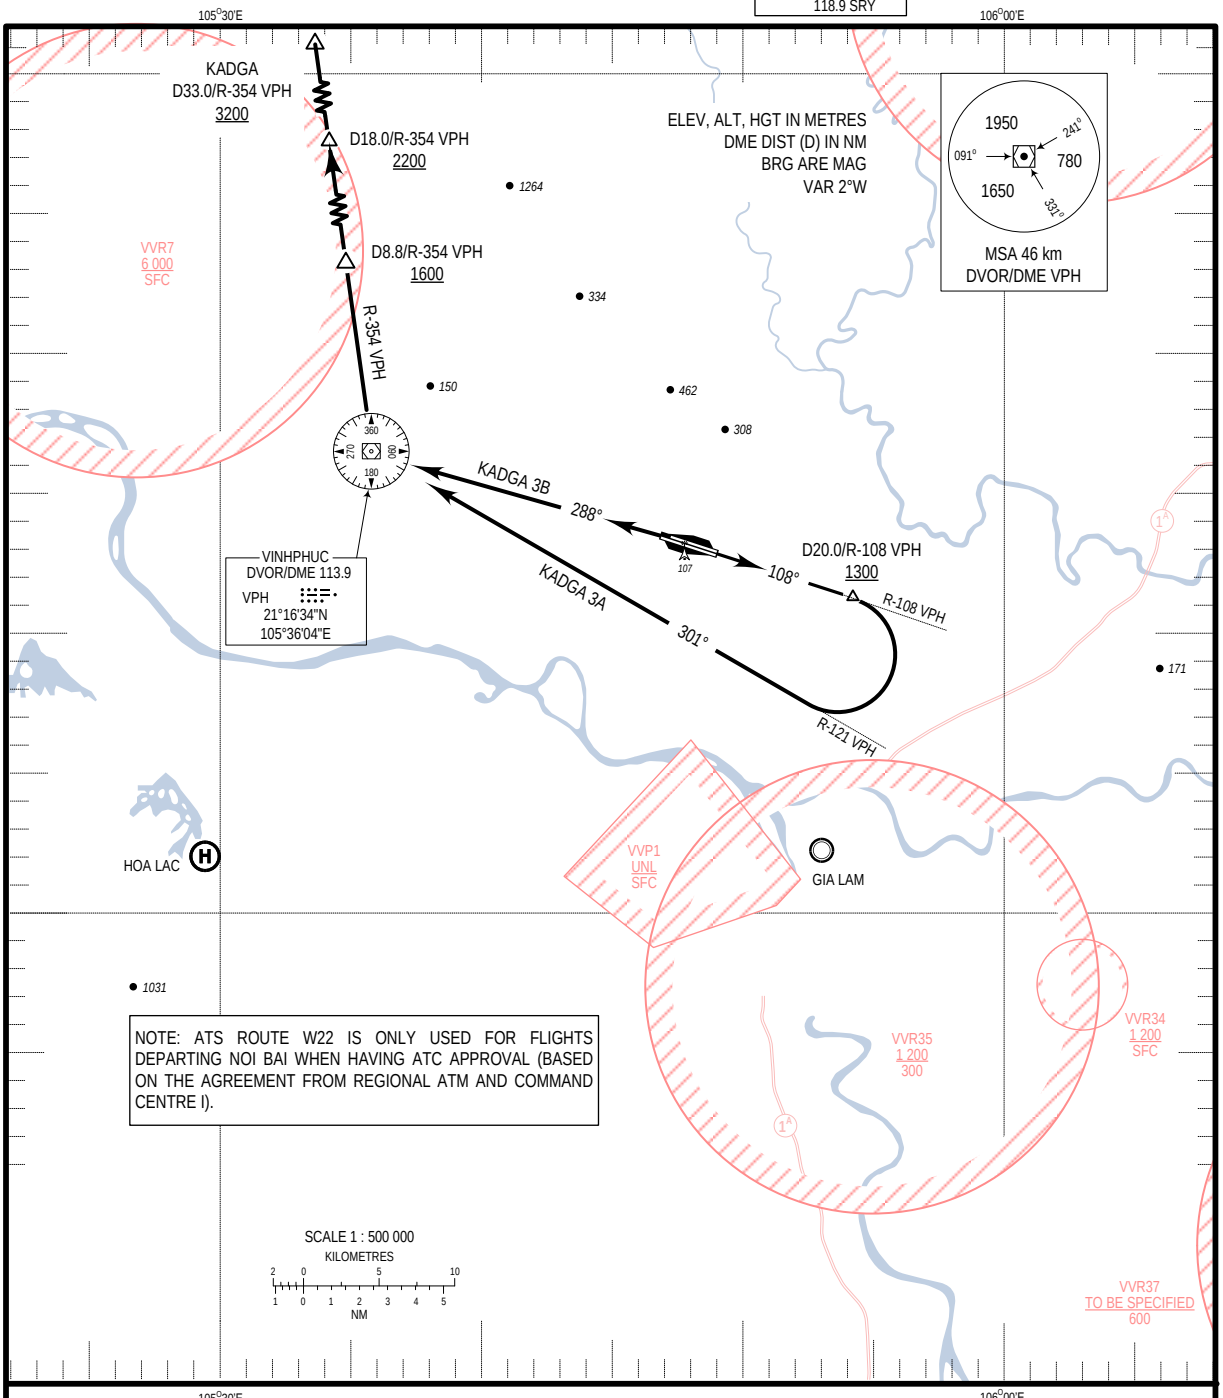

NOTE: ATS ROUTE W22 IS ONLY USED FOR FLIGHTS DEPARTING NOI BAI WHEN HAVING ATC APPROVAL (BASED ON THE AGREEMENT FROM REGIONAL ATM AND COMMAND CENTRE I).

RWY 11L/R

KADGA THREE ALPHA DEPARTURE (KADGA 3A): AFTER DEPARTURE, MAINTAIN RWY HEADING TO INTERCEPT R-108 VPH TO D20.0/R-108 VPH AT 1300 m OR ABOVE, TURN RIGHT FOLLOW R-121 VPH TO VPH DVOR/DME, TURN RIGHT TO INTERCEPT R-354 VPH TO D8.8/R-354 VPH AT 1600 m OR ABOVE, CONTINUE TO D18.0/R-354 VPH AT 2200 m OR ABOVE, TO KADGA AT 3200 m OR ABOVE.

RWY 29L/R

KADGA THREE BRAVO DEPARTURE (KADGA 3B): AFTER DEPARTURE, MAINTAIN RWY HEADING TO INTERCEPT R-108 VPH TO VPH DVOR/DME, TURN RIGHT TO INTERCEPT R-354 VPH TO D8.8/R-354 VPH AT 1600 m OR ABOVE, CONTINUE TO D18.0/R-354 VPH AT 2200 m OR ABOVE, TO KADGA AT 3200 m OR ABOVE.

CHANGE: KADGA (TAMDA).