AERODROME CHART - ICAO | 11°59'44"N 109°13'06"E | AERODROME ELEV *14M* | TWR: 118.2 PRI, 124.35 SRY, 121.5 EMERG | **KHANH HOA/CAM RANH INTL(VVCR)**

RWY	DIRECTION (TRUE)	THR WGS-84	BEARING STRENGTH
02L	019°	11°59'06"N 109°12'53"E	PCR 510/R/B/X/U
20R	199°	12°00'40"N 109°13'25"E	
02R	019°	11°58'53"N 109°12'59"E	PCR 650/R/A/W/U
20L	199°	12°00'27"N 109°13'32"E	

APN	FM 31 TO 42 AND FM 51 TO 71	PCR 650/R/A/W/U CEMENT CONCRETE
TWYS	G1, G3, G5, W, W1, W3, W5, W6, Y6	PCR 470/R/B/X/U CEMENT CONCRETE
	G7, Y7, W7	PCR 650/R/A/W/U CEMENT CONCRETE
	Y5	PCR 510/R/B/X/U CEMENT CONCRETE

ELEVATIONS AND DIMENSIONS IN METRES.
BEARINGS ARE MAGNETIC.


TWYS WIDTH:
- W, W1, W3, W5, W6, W7, Y5, Y6, Y7, G1, G3, G5, G7: 23M

NOTE:
TWYS Y3, Y4, W4, E, E1, E3, E5, E7, D1, D2, D3, D4 AND D5 ARE ONLY USED FOR MILITARY ACFT.

LEGEND	
ATC SERVICE BOUNDARY	
HOT SPOT AND NAME	HS 1
BUILDINGS	
UNSERVICEABLE (U/S)	
ARP	
TWY/RWY EDGE LIGHTS	
RUNWAY AHEAD	

LIGHTING AIDS THR RWY 02L/20R	LIGHTING AIDS THR RWY 02R/20L

EAST SEA
N
VAR 1°W (2019)
T2 PAX TERMINAL
T1 PAX TERMINAL
CIVIL APRON
MILITARY APRON
TWR ABN
NDB
DVOR/DME
HS 1
HS 2
HS 3
3067M X 45M CEMENT CONCRETE
RWY STRIP 3291 X 300
RWY STRIP 3368 X 300
ILS/GP 335 DME CH 40X
ILS/GP 330.2 DME CH 44X
ILS/GP 331.1 DME CH 56X
ELEV: 14M
ELEV: 10.5M
ELEV: 6.0M
ELEV: 4.8M
PALS CAT I
ILS/LLZ ICA 110.3
ILS/LLZ ICR 110.7
ILS/LLZ ICX 111.9
SALS
RESA 90 X 90
RESA 130 X 90
RESA 90 X 70
CWY 200 X 150
SWY 60 X 45
SWY 100 X 60
TURN PAD
PAPI 3.04°
PAPI 3.52°
PAPI 3.5°
SCALE 1: 30 000
METRES 300 0 500 1000
FEET 500 0 1000 2000 3000

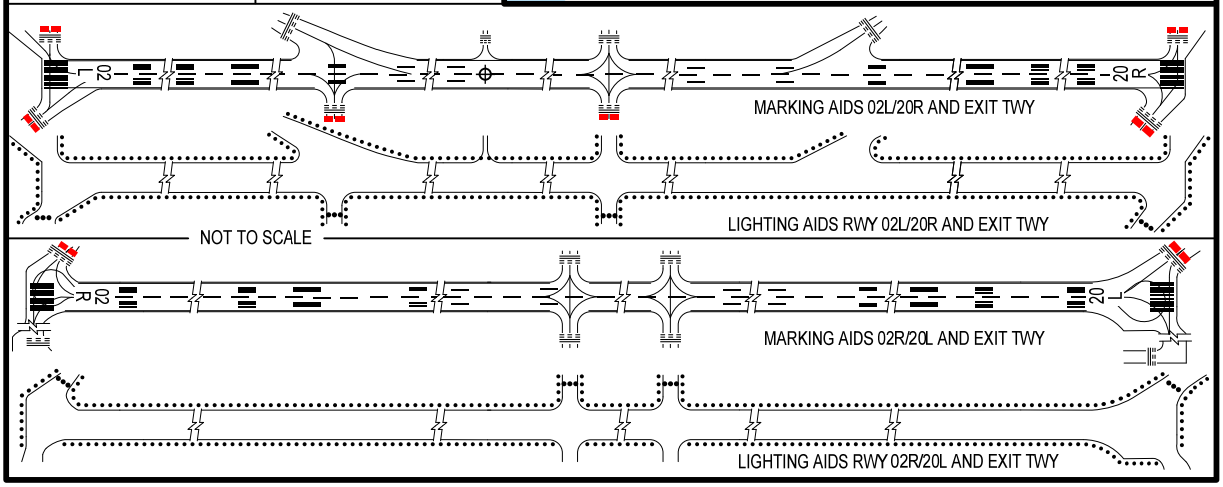

CHANGE: SUSPENSION OF CAM RANH GCU OPERATIONS.