
CHANGE: AMA.

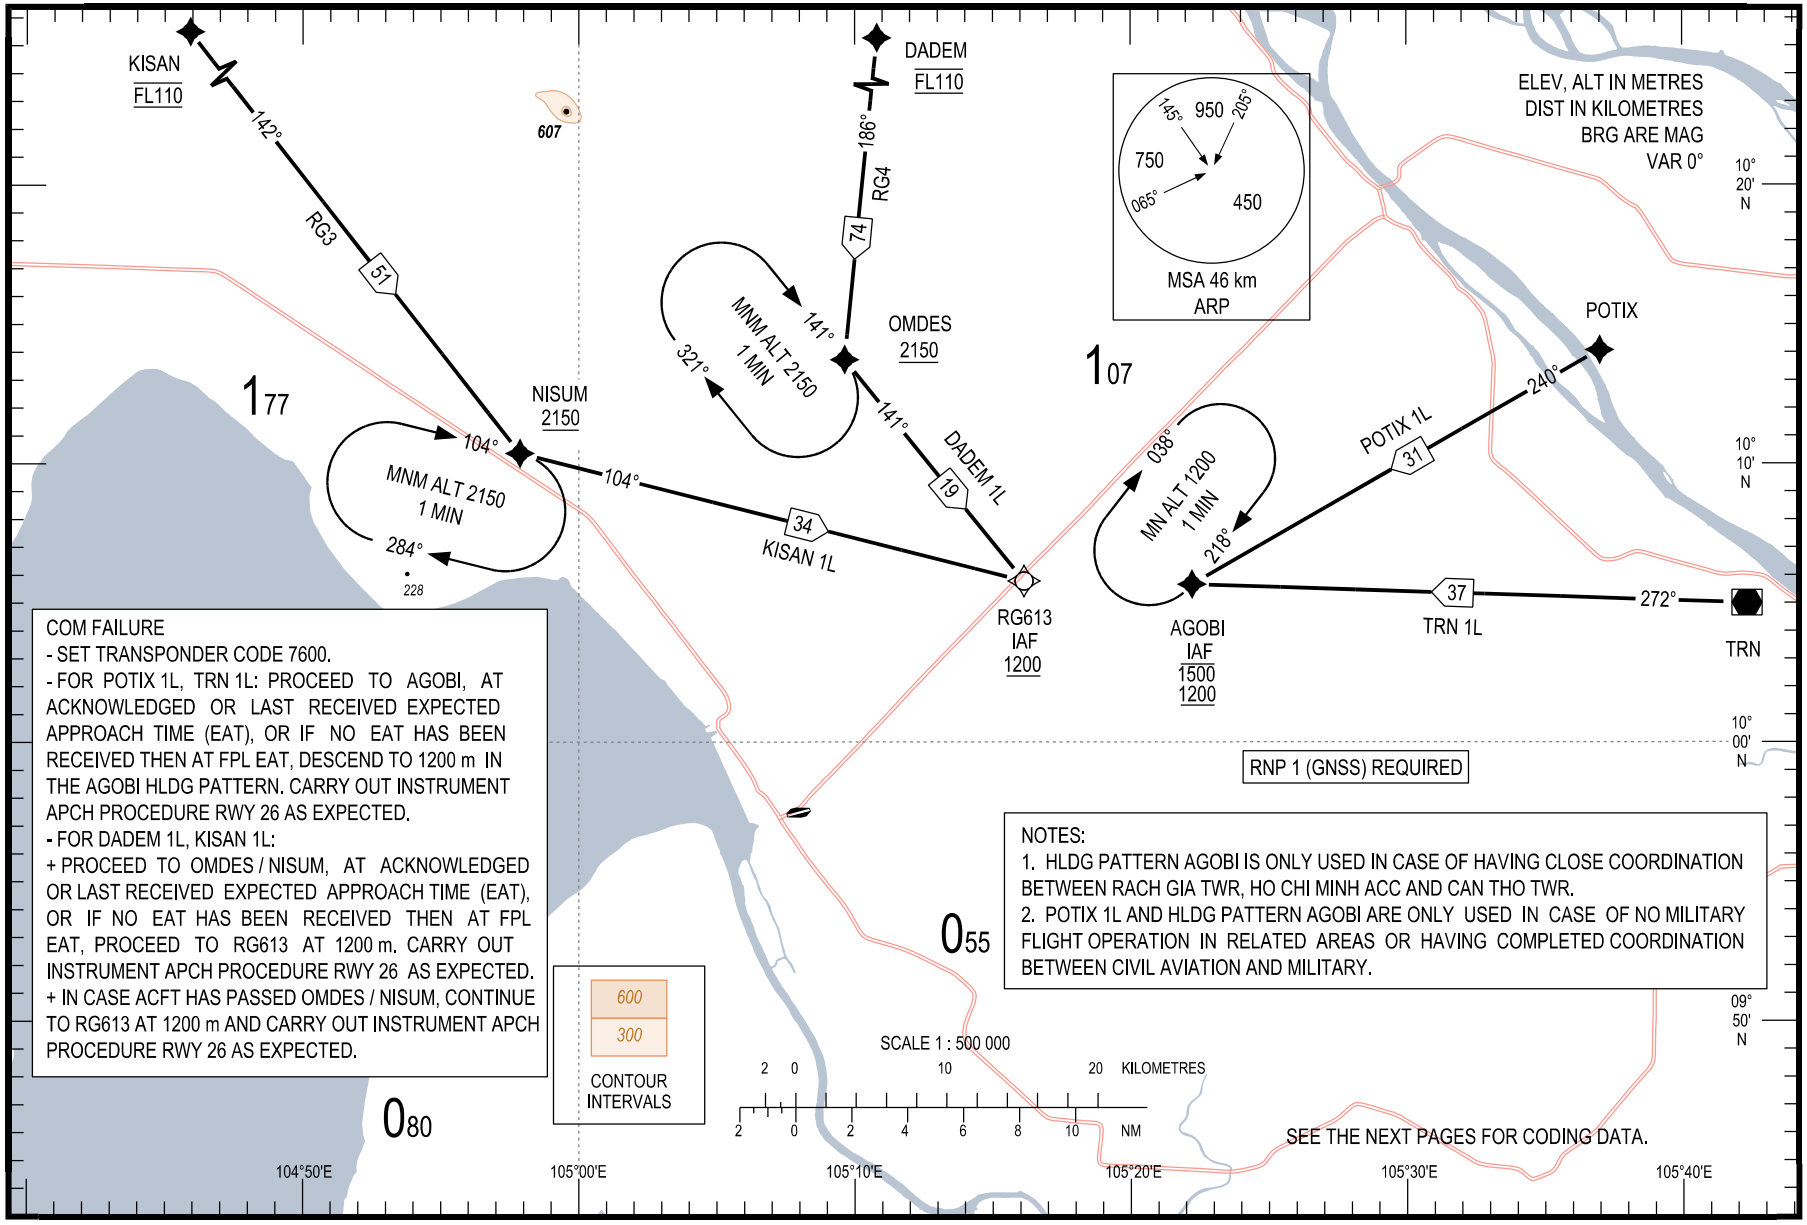

COM FAILURE
- SET TRANSPONDER CODE 7600.
- FOR POTIX 1L, TRN 1L: PROCEED TO AGOBI, AT ACKNOWLEDGED OR LAST RECEIVED EXPECTED APPROACH TIME (EAT), OR IF NO EAT HAS BEEN RECEIVED THEN AT FPL EAT, DESCEND TO 1200 m IN THE AGOBI HLDG PATTERN. CARRY OUT INSTRUMENT APCH PROCEDURE RWY 26 AS EXPECTED.
- FOR DADEM 1L, KISAN 1L:
+ PROCEED TO OMDES / NISUM, AT ACKNOWLEDGED OR LAST RECEIVED EXPECTED APPROACH TIME (EAT), OR IF NO EAT HAS BEEN RECEIVED THEN AT FPL EAT, PROCEED TO RG613 AT 1200 m. CARRY OUT INSTRUMENT APCH PROCEDURE RWY 26 AS EXPECTED.
+ IN CASE ACFT HAS PASSED OMDES / NISUM, CONTINUE TO RG613 AT 1200 m AND CARRY OUT INSTRUMENT APCH PROCEDURE RWY 26 AS EXPECTED.

NOTES:
1. HLDG PATTERN AGOBI IS ONLY USED IN CASE OF HAVING CLOSE COORDINATION BETWEEN RACH GIA TWR, HO CHI MINH ACC AND CAN THO TWR.
2. POTIX 1L AND HLDG PATTERN AGOBI ARE ONLY USED IN CASE OF NO MILITARY FLIGHT OPERATION IN RELATED AREAS OR HAVING COMPLETED COORDINATION BETWEEN CIVIL AVIATION AND MILITARY.

STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

TRANSITION ALTITUDE 2750

TWR 118.3

AN GIANG/RACH GIA DOM (VVRG)
RNP RWY 26
POTIX 1L, TRN 1L, DADEM 1L, KISAN 1L